
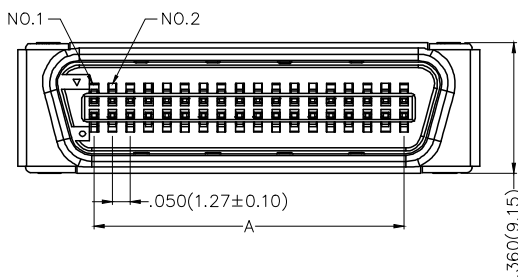
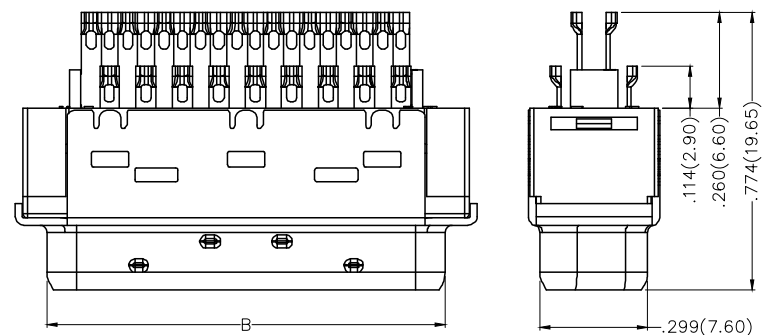


A
B
C
D
E
F

1 2 3 4 5 6 7 8

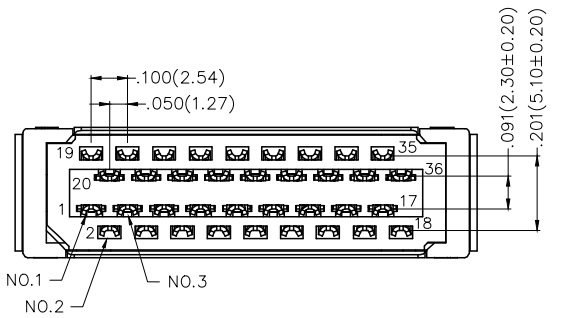

Circuits (n)	Part No.	Dimensions(in./mm)	
		A	B
14	FCS1410-MOWS3XXK6K	.300(7.62)	.543(13.80)
20	FCS2010-MOWS3XXK6K	.450(11.43)	.693(17.61)
26	FCS2610-MOWS3XXK6K	.600(15.24)	.843(21.42)
36	FCS3610-MOWS3XXK6K	.850(21.59)	1.093(27.77)
50	FCS5010-MOWS3XXK6K	1.200(30.48)	1.443(36.66)

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 1A AC(rms)/DC
Voltage Rating: 40V AC(rms) 500V DC
Contact Resistance: 35 mΩ Max
Insulation Resistance: 200 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range-Operating: -25°C~+85°C

Material and Plating
Housing: PBT (UL 94V-0), Black
Contact: Phosphor Bronze/ gold Plated 3u" in contact area, tin on tail
Cover: Copper Alloy/ Nickel plated
Shell: SPCC/ Nickel plated

A
B
C
D
E
F

Ordering Information

FCS XX 10 — M0 W S 3 XX K6 K
1 2 3 4 5 6 7 8 9 10

1	Category FCS-SCSI	2	Circuits XX	3	Distinction No. 10	4	Type M0-Male	5	Assembly Layout W-Welding Type	6	Entry Angle S-180° Vertical
7	Plating 3-Selective gold in contact area, bright tin on tail	8	Thickness of Plating 00-Gold flash 03-3μ" Custom plate available	9	Color-Resin K6-Black	10	Packaging K-Tray				

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FCSXX10-MOWS3XXK6K	ITEM NO. FCSXX10	 Leader Of Industry	
	X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE SCSI Connector Pitch 1.27mm 180° Vertical Male			REV 0
	DESIGN UNITS Inch (metric)	X.XX±.008(0.20)	.X°±2°	DRAWN BY KEVIN	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX°±1°	X.XX±.004(0.10)	.XX°±0.5°		

1 2 3 4 5 6 7 8