REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

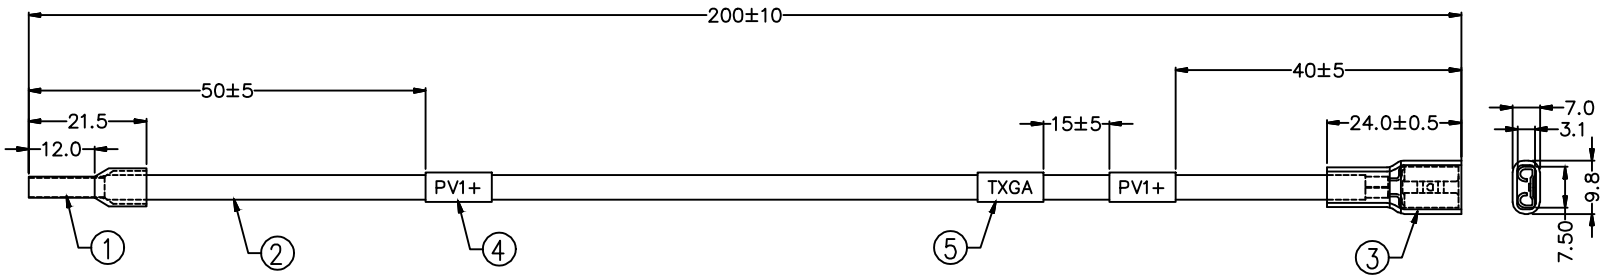

* Note: All Materials Meet The "RoHs" !

NO.	Specification
5	White Label ø5*15mm, Printing "TXGA" : R-LABEL-82
4	White Label ø5*15mm, Printing: PV1+
3	Type 250 Terminal Female (Insulator Tube: PVC Yellow) (Mate With Male Terminal: 6.35*0.8mm)
2	UL1015 12AWG(65/0.25TS) OD=4.0mm Red
1	Cord End Terminal: ø3.9*ø3.5mm (Insulation tube: Black)

Electrical
1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification
1. 50pcs/Bundle, 300pcs/Bag

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 31/AUG/16	PART NO. FCW001-000526 / ITEM NO. FCW001
	X. ±0.30	X.° ±5°	CHECKED BY CHERRY	DATE 31/AUG/16	TITLE: SINGLE CONDUCTOR CABLE
DESIGN UNITS Metric	X.X ±0.20	X.X° ±2°			REV 0 / SHEET NO. 1/1
SCALE 5:1 / SIZE A4	X.XX ±0.15	X.XX° ±1°	DRAWN BY KATE	DATE 31/AUG/16	
	X.XXX ±0.10	X.XXX° ±0.5°			

TXGA Leader Of Industry

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION