


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

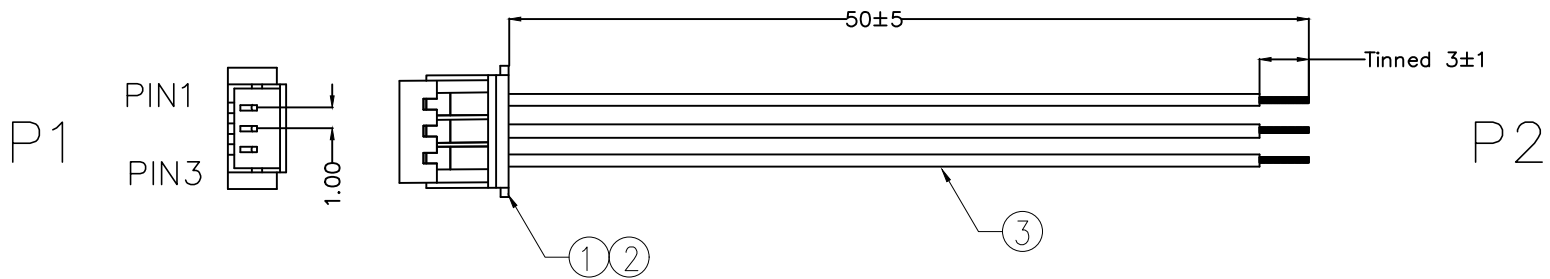

PIN ASSIGNMENT

P1	P2
PIN1 — Black	Tinned
PIN2 — White	Tinned
PIN3 — Red	Tinned

Electrical

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification

50pcs/Bundle, 300pcs/Bag

* Note: All Materials Meet The "RoHs" !

NO.	Specification
3	UL1571 30AWG(7/0.10TS) OD=0.8mm White/Black/Red
2	Wire to board terminal 1.0mm Female(Tin-Plated) T10001-F2H
1	Wire to board housing 1.0mm 3Circuits HG10001-S03M2W1B

<p>THIRD ANGLE PROJECTION</p>	<p>GENERAL TOLERANCES (UNLESS SPECIFIED)</p>		<p>APPROVE BY FRANK</p>	<p>DATE 05/SEP/19</p>	<p>PART NO. FCW001-000931</p>	<p>ITEM NO. FCW001</p>	<p>Leader Of Industry</p>	
	<p>DESIGN UNITS Metric</p>	<p>X. ±0.30</p>	<p>X.' ±5'</p>	<p>CHECKED BY CHERRY</p>	<p>DATE 05/SEP/19</p>	<p>TITLE Single Conductor Cable</p>		<p>REV 0 SHEET NO. 1/1</p>
<p>SCALE 5:1</p>	<p>SIZE A4</p>	<p>X.XX ±0.15</p>	<p>X.XX' ±1'</p>	<p>DRAWN BY ZOEY</p>	<p>DATE 05/SEP/19</p>	<p>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</p>		

1 2 3 4 5 6 7 8

A
B
C
D
E
F

A
B
C
D
E
F