


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

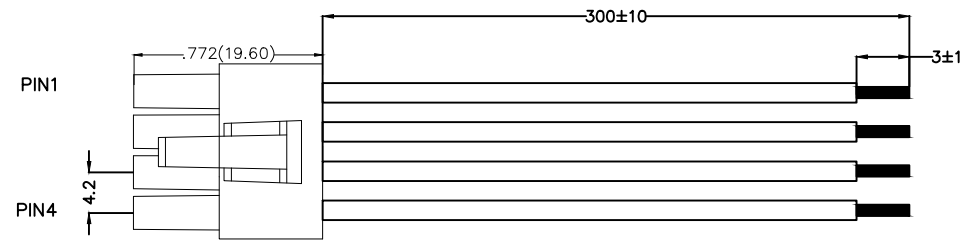

P1

P2

PIN ASSIGNMENT

	P1	P2
PIN1	RED	TINNED
PIN2	BLACK	TINNED
PIN3	RED	TINNED
PIN4	BLACK	TINNED

Electrical
 1. Withstanding Voltage: DC 300V
 2. Conduction impedance: 3Ω (MAX)
 3. Insulation Resistance: 10MΩ (MIN)
 Packing specification
 50pcs/Bundle, 250pcs/Bag

* Note: All Materials Meet The "RoHs" !

NO.	Specification
3	Wire to board terminal 4.2mm Female(Tin-Plated) T42001-F2H
2	Wire to board housing 4.2mm 4Circuits HG42003-S04M2TB
1	UL1332 20AWG(19/0.19TS) OD=1.59mm (BLACK/RED)

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	X. ±0.30	X.* ±5°	FRANK	10/SEP/19	FCW001-000948	FCW001		
DESIGN UNITS Metric	X.X ±0.20	X.X* ±2°	CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
SCALE 5:1	X.XX ±0.15	X.XX* ±1°	CHERRY	10/SEP/19	Single Conductor Cable		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SIZE A4	X.XXX ±0.10	X.XXX* ±0.5°	DRAWN BY	DATE				
			Aubrey	10/SEP/19				