REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

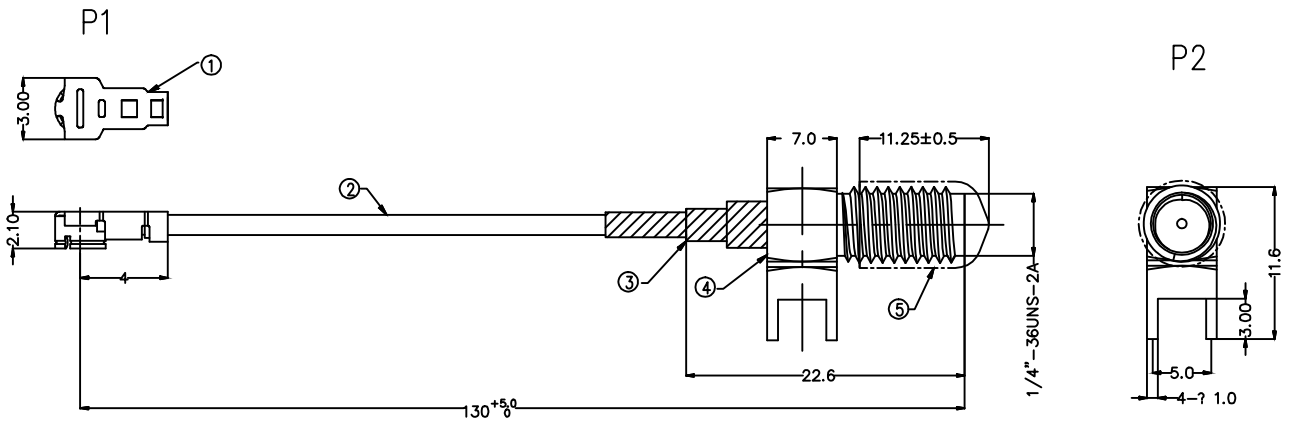

Electrical
1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification
1. 50pcs/Bundle, 250pcs/Bag

PIN ASSIGNMENT

P1		P2
Center Pin	——	Center Pin
Shell	——	Shell

* Note: All Materials Meet The "RoHs" !

NO.	Specification
5	Red insulating sheath
4	RF TNC connector, Gold plated: RF05002-PEB103MA
3	Black Heat Shrink Tube ø3.5mm
2	1.13 RF Coaxial cable Jack gray, OD=1.13mm
1	RF MHF I Plug: RF05002-PEB103MA

THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.
				FRANK	20/JUL/17	FCW018-000002	FSP11051
DESIGN UNITS Inch (metric)		X.±.012(0.30)	X.°±5°	CHECKED BY	DATE	TITLE	TXGA Leader Of Industry
		X.X±.008(0.20)	.X°±2°	JACOB	20/JUL/17	MICROWAVE CABLE ASSEMBLIES	REV 0 / SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX°±1°	DRAWN BY	DATE		
		X.XXX±.004(0.10)	.XXX°±0.5°	LXF	20/JUL/17		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION