

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Part No.: Change FRJ1111 into FRJ11001	05/JUN/18	KATE	ERIC




SPECIFICATIONS

Electrical

Current Rating: 1.5A AC(rms)/DC
Voltage Rating: 125V AC(rms)/DC
Contact Resistance: 20 mΩ Max
Insulation Resistance: 500 MΩ MIN
Withstanding Voltage: 1000V AC r.m.s
Operating Temperature: -40°C~+85°C

Material

Housing: PBT UL 94V-0
Contact: Gold Plating Over Nickel
PC Plug should bear 10N Pulling Force Without 750Times Min

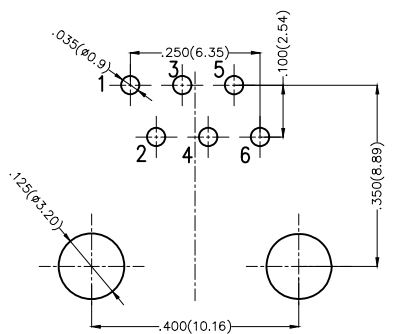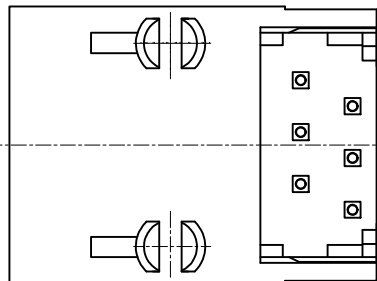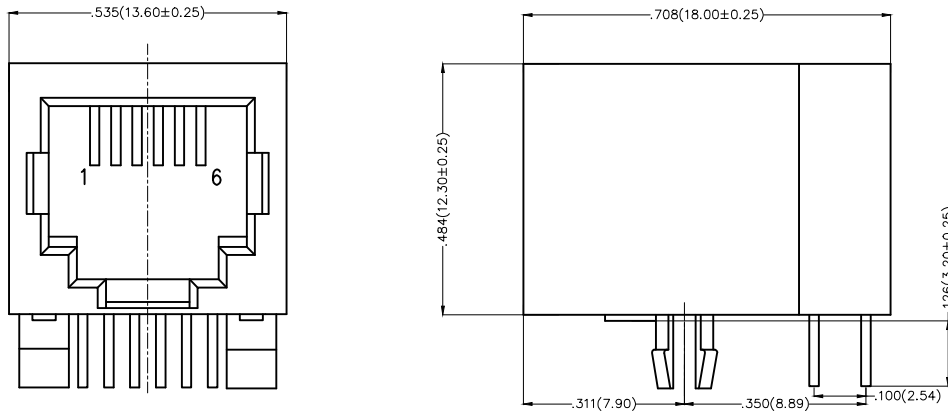

Recommended P.C.Board Layout

Ordering Information

FRJ11 001 - 1 1 XX K6 K 2 0
1 2 3 4 5 6 7 8

1 Category FRJ11-RJ11 Connector	2 Distinction No. 001	3 Ports options 1-1 Port	4 Plating 1-Gold Plated
5 Thickness of plating 00-Gold flash 03-3μ" Custom plate available	6 Color-Resin K6-Black	7 Packaging K-Tray	8 Contact type 2-Round pin

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 1/AUG/13	PART NO. △ FRJ11001-11XXK6K20	ITEM NO. FRJ11001	 Leader Of Industry
	DESIGN UNITS Inch (metric)	X.±.012(0.30)	X.'±5'	CHECKED BY CHERRY	DATE 1/AUG/13	TITLE RJ11 Connector 6P6C 90° Angle	
SCALE 5:1	SIZE A4	X.XX±.008(0.20)	X'±2'	DRAWN BY JACOB	DATE 1/AUG/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XX±.006(0.15)	.XX±1'			REV 1	SHEET NO. 1/1
		X.XXX±.004(0.10)	.XXX±0.5'				