



Part No.	Housing color
FAS20006-D08S81WHB	White
FAS20006-D08S81BKB	Black


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

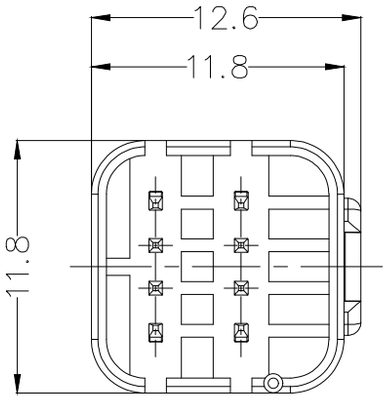

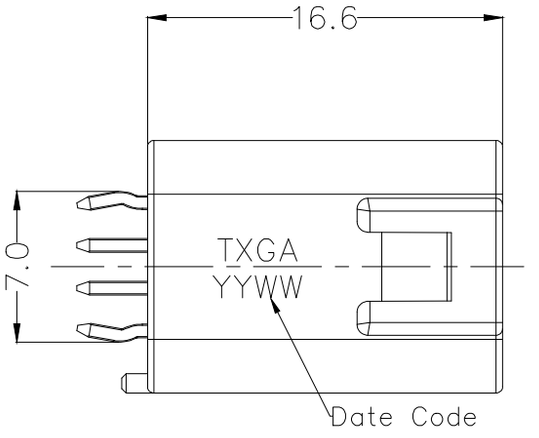

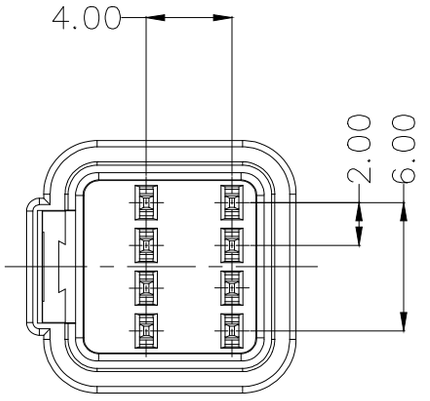

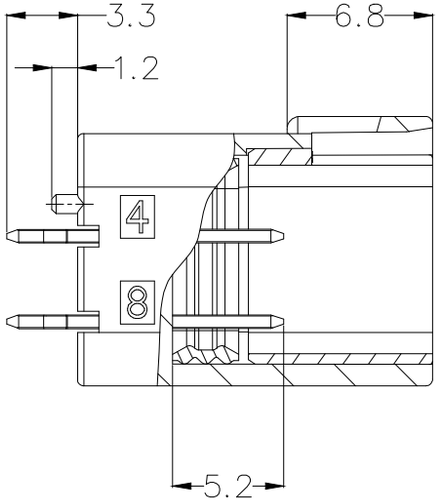

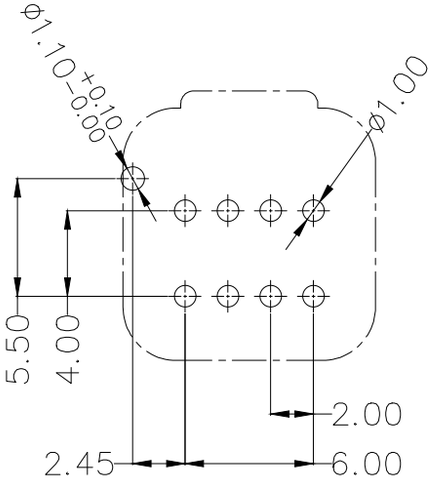

Recommended P.C.Board Layout

SPECIFICATIONS

Material:
- Housing: PBT (UL 94V-0)
- Inner Housing: PBT (UL 94V-0), Orange
- Inner Seal: Rubber Silicone, Blue
- Terminal: Copper Alloy,Tin plated

Temperature Range-Operating: -25℃~+85℃
Mates With: FAH20006-D08F1XXB

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FAS20006-D08S81XXB / ITEM NO. FAS20006
DESIGN UNITS mm	X. ±0.35	X.° ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE Board side Receptacle Pitch 2mm
	X.X ±0.25	X.X° ±2°			
	X.XX ±0.15	X.XX° ±1°	DRAWN BY PYD	DATE 30/JAN/23	
SCALE 5:1 / SIZE A4	X.XXX ±0.10	X.XXX° ±0.5°			

TXGA Building Technology Cornerstone

REV 0 | SHEET NO. 1/1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION