

REV		LOCATIONS		DESCRIPTION		DATE		REVISER		APPD	

SPECIFICATION

Technical Parameters

No. of contact: 40+PE
Rated current: 10A
Rated voltage: 250V
Rated impulse voltage: 4KV
Contact resistance: 3mΩ MAX
Wire gauge: 0.14—2.5mm²(26—14 AWG)
Insulation resistance: 10¹⁰Ω MIN
Temperature range: -40°C~+125°C
Pollution degree: 3


Mechanical

Connection method: Riveting

Durability: 500 cycles MIN

Material and Plating

Insulators: PC(UL 94V-0), Light grey

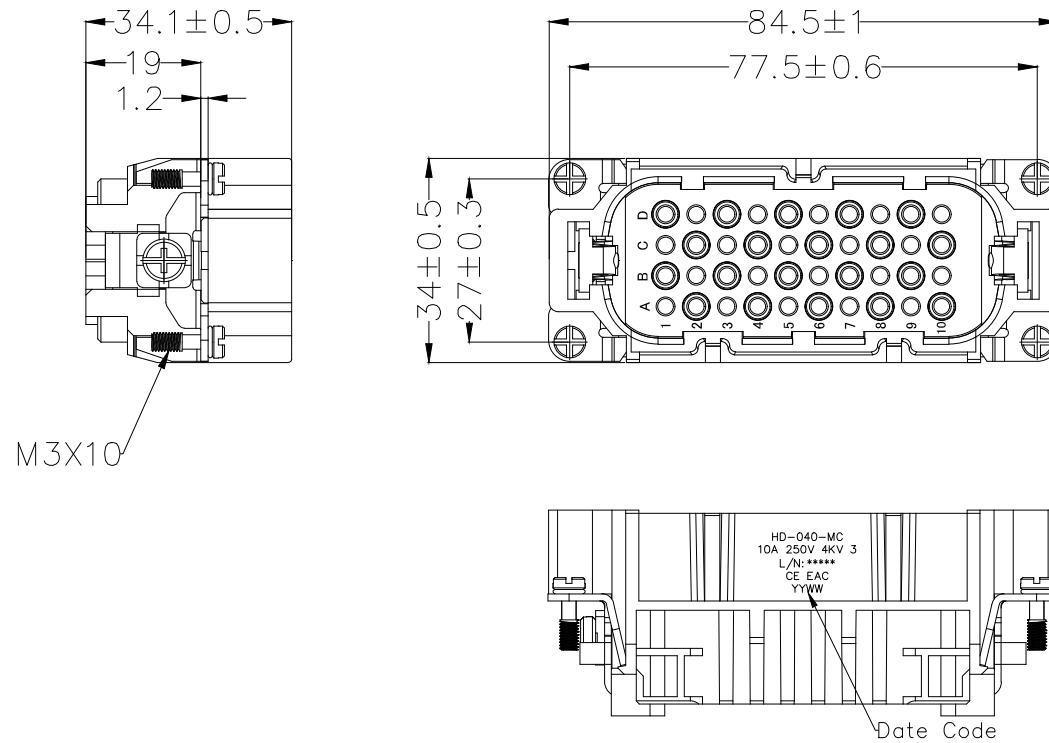

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHD00003-M0400GYRA	ITEM NO. FHD00003	 Building Technology Cornerstone		
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector HD Insert				
DESIGN UNITS mm		X.X ±0.20	X.X' ±2°	GISELLE	30/JUN/21				REV 0	
		X.XX ±0.15	X.XX' ±1°	DRAWN BY	DATE					
SCALE 5:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5°	PYD	30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				