




REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters
No. of contact: 40+PE
Rated current: 10A
Rated voltage: 250V
Rated impulse voltage: 4KV
Contact resistance: 3mΩ MAX
Wire gauge: 0.14—2.5mm²(26—14 AWG)
Insulation resistance: 10¹⁰Ω MIN
Temperature range: -40°C~+125°C
Pollution degree: 3

Mechanical
Connection method: Riveting
Durability: 500 cycles MIN

Material and Plating
Insulators: PC(UL 94V-0),Light grey

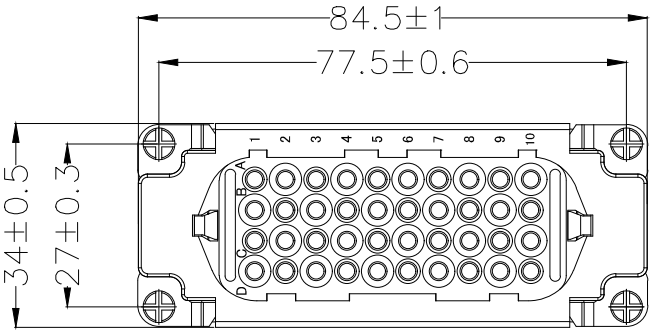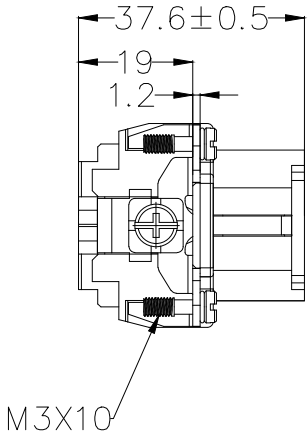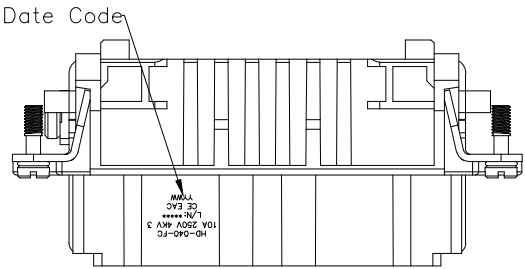

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHD00004-F0400GYRA	ITEM NO. FHD00004	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Heavy-duty connector HD Insert			
DESIGN UNITS mm		X.X ±0.20	X.X' ±2°	GISELLE	30/JUN/21			REV 0	
		SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX' ±1°	DRAWN BY PYD	DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
X.XXX ±0.10	X.XX' ±0.5°								