

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATION

Technical Parameters





No. of contact: 46+PE
Rated current: 16A
Rated voltage: 500V
Rated impulse voltage: 6KV
Rated voltage acc.to UL/CSA: 600V
Contact resistance: 1mΩ MAX
Wire gauge: 0.14–4mm²(26–12 AWG)
Stripping length: 7.5mm
Insulation resistance: 10¹⁰Ω MIN
Temperature range: -40°C~+125°C
Pollution degree: 3

Mechanical

Connection method: Riveting
Durability: 500 cycles MIN

Material and Plating

Insulators: PC(UL 94V-0),Light grey

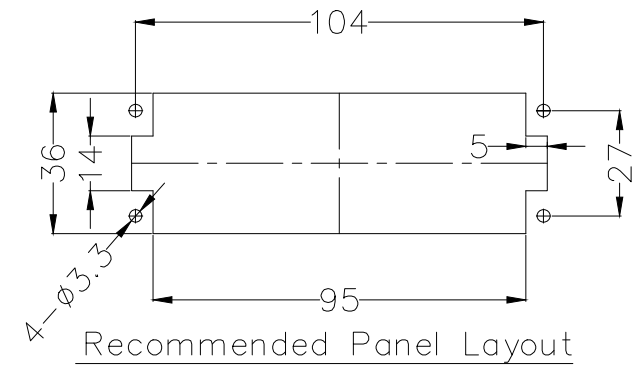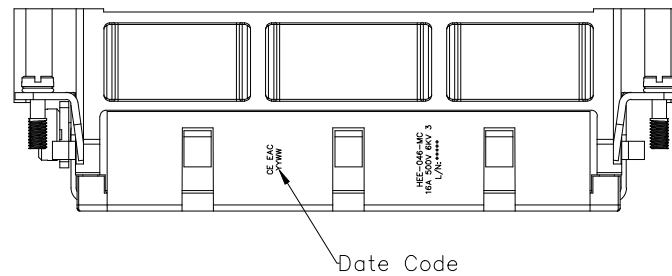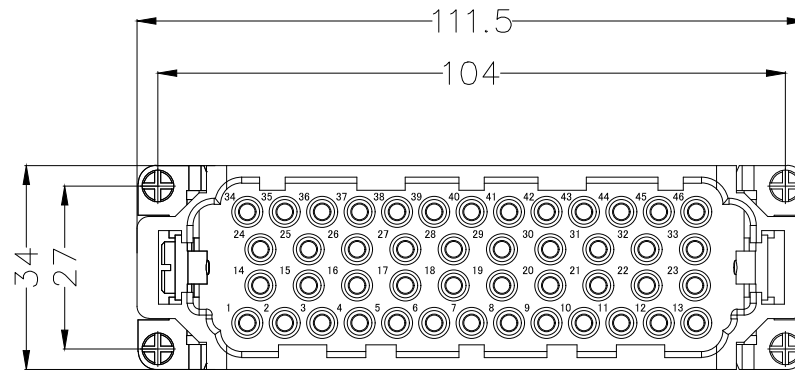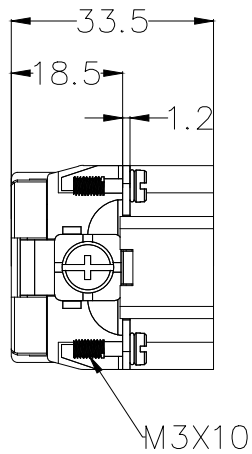

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JUN/21	PART NO. FHEE0009-M0460GYRA	ITEM NO. FHEE0009	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5'	CHECKED BY GISELLE	DATE 30/JUN/21	TITLE Heavy-duty connector HEE Insert			
DESIGN UNITS mm		XX ±0.20	XX.* ±2'		DRAWN BY PYD			DATE 30/JUN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
		XX.X ±0.15	XX.X.* ±1'						
SCALE 5:1	SIZE A4	XXX ±0.10	XXX.* ±0.5'			REV 0 SHEET NO. 1/1			