
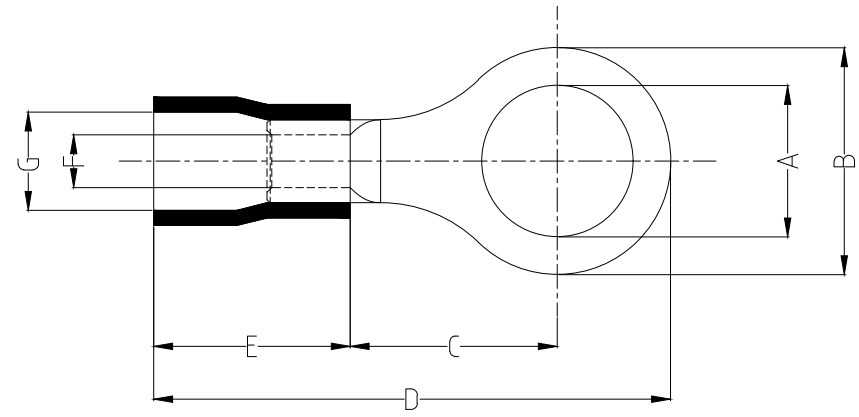


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes:

Material: Copper
 Insulator: PVC (UL 94V-0)
 Plating: Matte tin plated
 Wire range: 1.5~2.5mm² / (16~14AWG)
 Applicable screw: 3/8"
 Temperature Range—Operating: 0°C~75°C
 Maximum electrical rating: 600V
 Max current: 27A

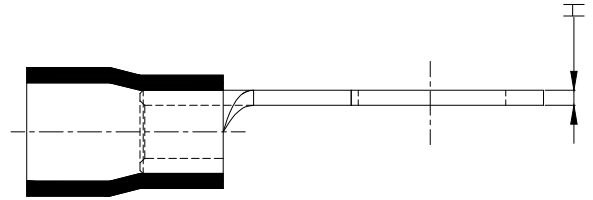

Dimensions							
A	B	C	D	E	F	G	H
±0.3	±0.5	±1	±1	±1	±0.5	±0.5	±0.05
10.5	13.6	13.9	31.5	10.5	2.3	4.7	0.8

PART NO.	Color Of Insulator
FRT02-002001000ARD2	Red
FRT02-002001000ABU2	Blue
FRT02-002001000ABK2	Black

THIRD ANGLE PROJECTION
 DESIGN UNITS mm
 SCALE 5:1 SIZE A4

GENERAL TOLERANCES (UNLESS SPECIFIED)	
X. ±0.30	X.* ±5'
X.X ±0.20	X.X' ±2'
X.XX ±0.15	X.XX' ±1'
X.XXX ±0.10	X.XXX' ±0.5'

APPROVE BY LEO	DATE 09/JAN/21
CHECKED BY GISELLE	DATE 09/JAN/21
DRAWN BY PYD	DATE 09/JAN/21

PART NO. FRT02-002001000AXX2	ITEM NO. FRT02
TITLE Ring tongue terminal	

Building Technology Cornerstone
 REV 0 SHEET NO. 1/1
 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

1 2 3 4 5 6 7 8