
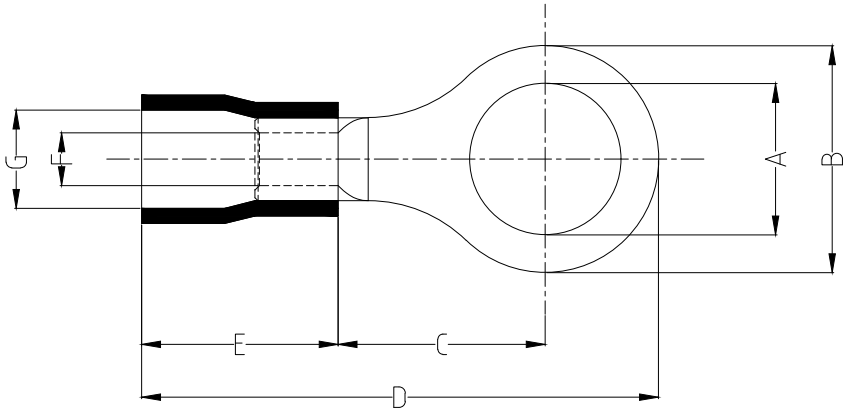


1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Notes:

Material: Copper  
 Insulator: PVC (UL 94V-0)  
 Plating: Matte tin plated  
 Wire range: 2.5~4mm<sup>2</sup> / (14~12AWG)  
 Applicable screw: #10 UNC  
 Temperature Range-Operating: 0°C~75°C  
 Maximum electrical rating: 600V  
 Max current: 37A

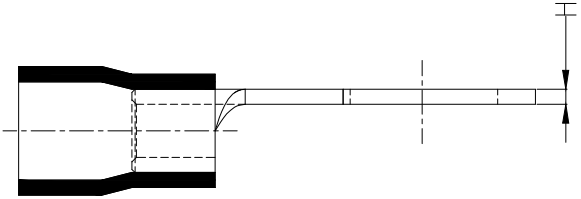

Dimensions							
A	B	C	D	E	F	G	H
±0.3	±0.5	±1	±1	±1	±0.5	±0.5	±0.05
5.3	8.0	8.0	25.7	13.2	2.9	6.2	1.0

PART NO.	Color Of Insulator
FRT02-00350050SARD2	Red
FRT02-00350050SABU2	Blue
FRT02-00350050SABK2	Black

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	
	X. ±0.30	X.* ±5'	LEO	09/JAN/21			FRT02-00350050SAXX2
	DESIGN UNITS mm		CHECKED BY	DATE	TITLE		<p>Building Technology Cornerstone</p>
	X.X ±0.20	X.X' ±2'	GISELLE	09/JAN/21	Ring tongue terminal		
SCALE	SIZE	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	REV 0	SHEET NO. 1/1
5:1	A4	X.XXX ±0.10	X.XXX' ±0.5'	PYD	09/JAN/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

1 2 3 4 5 6 7 8