


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

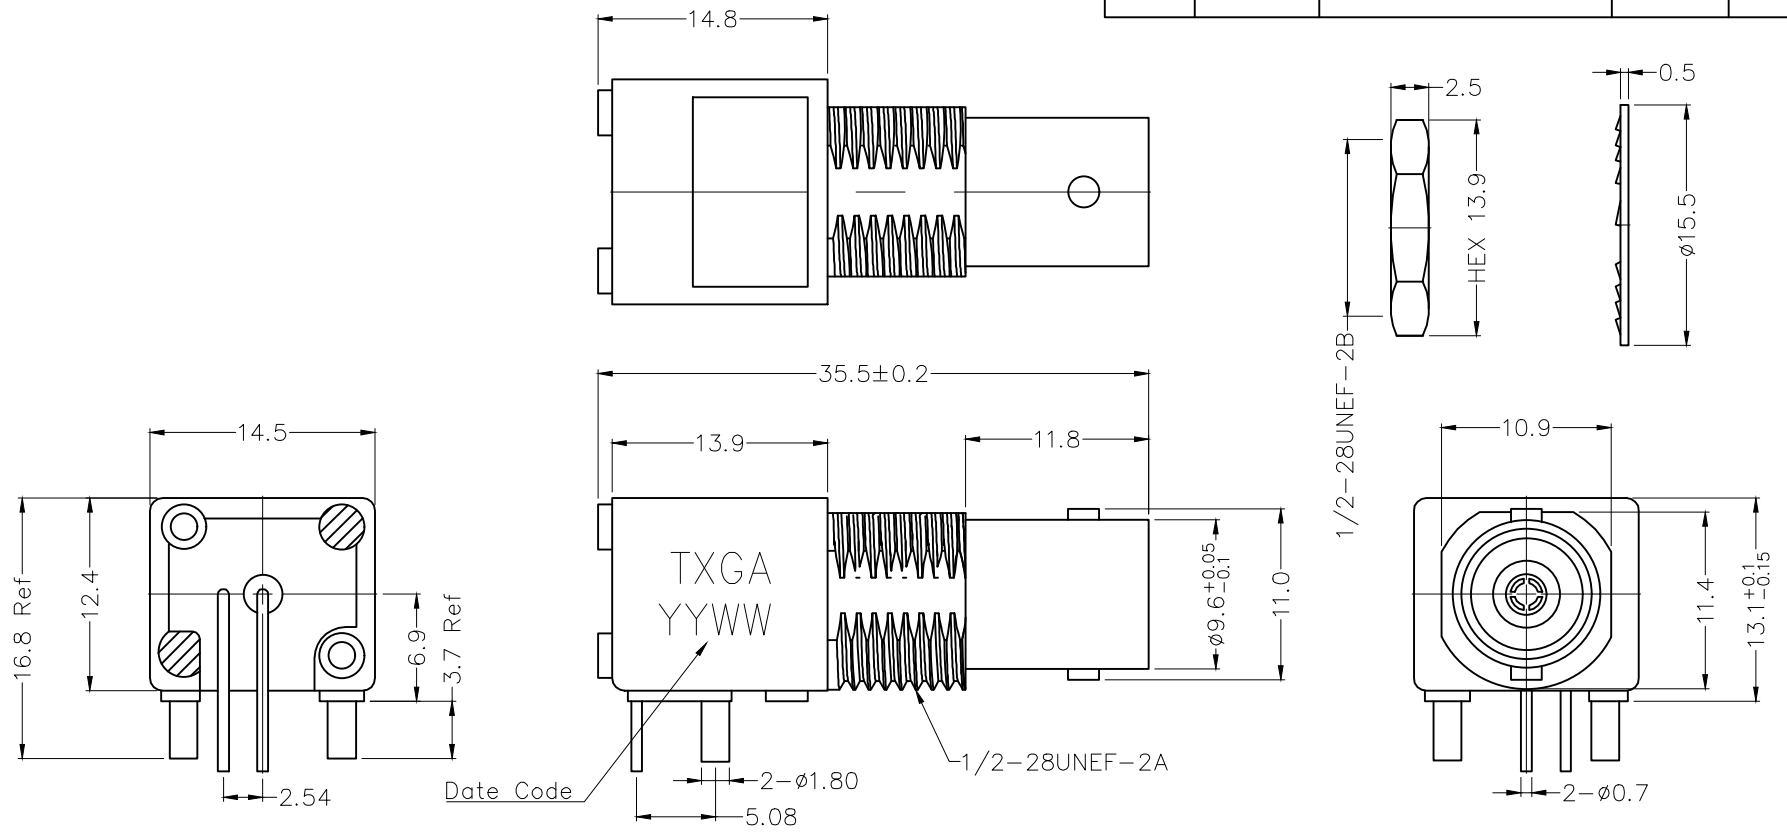

SPECIFICATIONS

Technical Parameters
 Impedance: 75Ω
 Frequency range: 0~4 GHz
 S.W.R: 1.5 Max.
 Voltage rating: 500V Max. r.m.s at sea level
 Insulation Resistance: 5000 MΩ Min.
 Temperature Range-Operating: -40°C~+95°C

Material and Plating
 Body assembly: Zinc Alloy, Nickel plated
 Contact: Brass, 0.8U" Gold plated
 Insulator: POM (UL 94V-0), White
 Washer: Steel, Nickel plated
 Nut: Brass, Nickel plated

Recommended Panel Cut Out

Recommended P.C.Board Layout

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Building Technology Cornerstone	
	X. ±0.30	X.* ±5°	FRANK	03/AUG/21	F00BNC-J75S0BHD-01	F00BNC		
	DESIGN UNITS	X.X ±0.20	X.X* ±2°	CHECKED BY	DATE	TITLE	REV 0	SHEET NO. 1/1
	Metric	X.XX ±0.15	X.XX* ±1°	CHERRY	03/AUG/21	BNC Socket 90° Angle(DIP)	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SCALE	SIZE	X.XXX ±0.10	X.XXX* ±0.5°	DRAWN BY	DATE			
1:1	A4			MATT	03/AUG/21			