


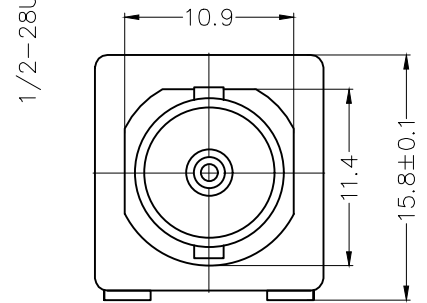
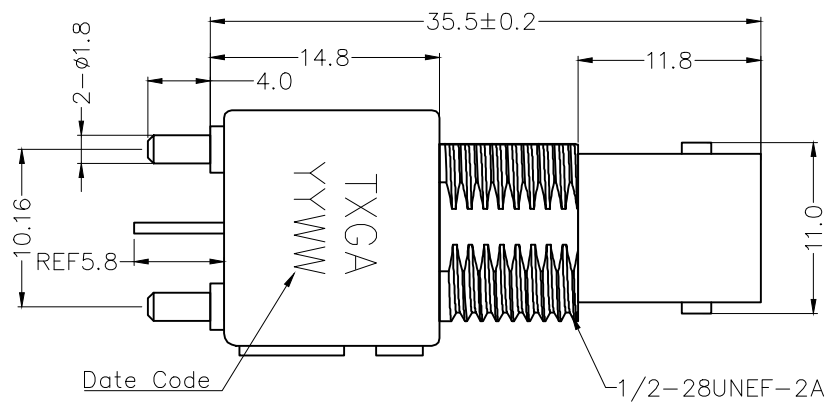
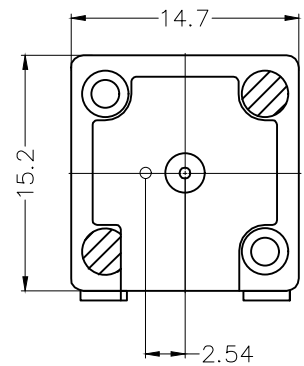
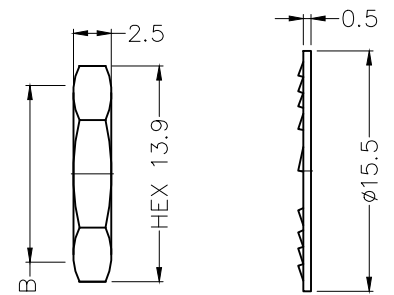


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

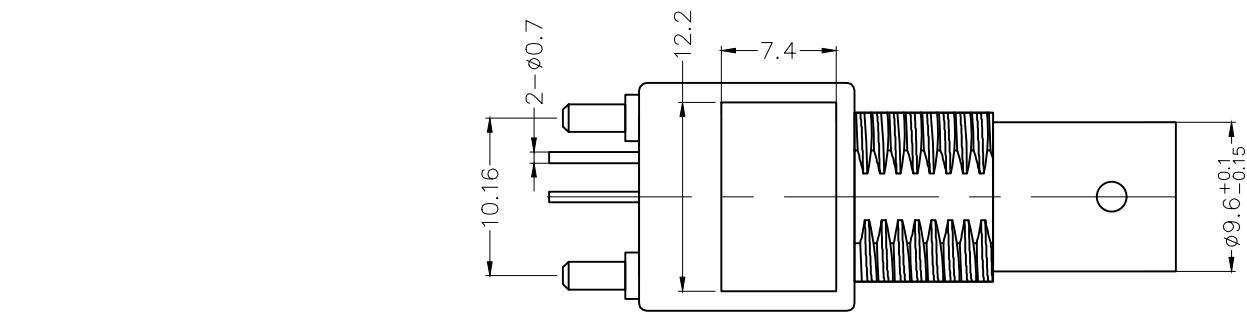

Recommended Panel Cut Out

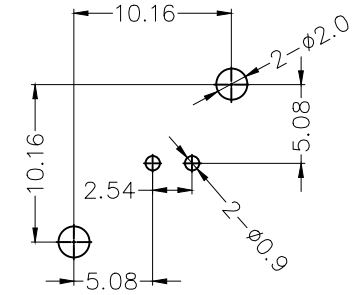

Recommended P.C.Board Layout

SPECIFICATIONS

Technical Parameters

- Impedance: 75Ω
- Frequency range: 0~4 GHz
- S.W.R: 1.5 Max.
- Voltage rating: 500V Max. r.m.s at sea level
- Insulation Resistance: 5000 MΩ Min.
- Temperature Range-Operating: -40°C~+95°C

Material and Plating

- Body: Zinc Alloy, Nickel plated
- Contact: Brass, Gold plated
- Insulator: POM (UL 94V-0), White
- Washer: Steel, Nickel plated
- Nut: Brass, Nickel plated
- Fixture: Brass, Tin plating
- Contact wire: Steel, Tin plating

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5°	FRANK	03/AUG/22	FO0BNC-J75S0BHD-02	FO0BNC		
	DESIGN UNITS	X.X ±0.20	X.X' ±2°	CHECKED BY	DATE	TITLE	REV 0	SHEET NO. 1/1
	Metric	X.XX ±0.15	X.XX' ±1°	CHERRY	03/AUG/22	BNC Socket 180° Vertical(DIP)		
SCALE	SIZE	X.XXX ±0.10	X.XXX' ±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
1:1	A4			NICK	03/AUG/22			