

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

B

C

D

E

F

A



B

C


D

E

F

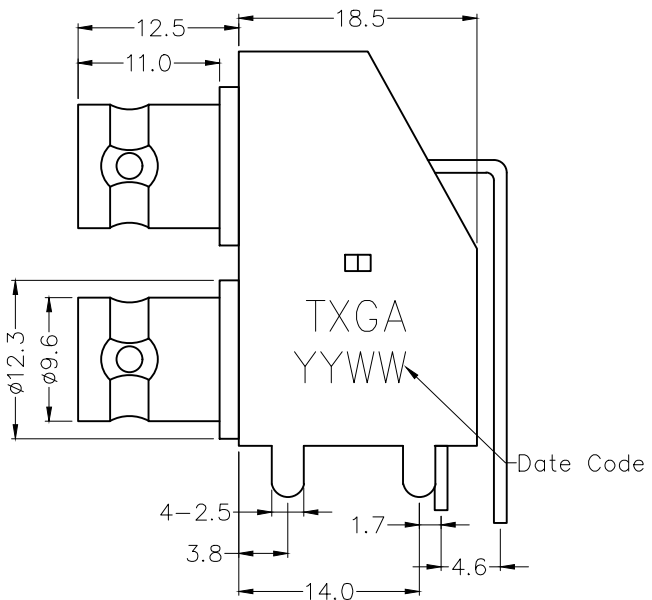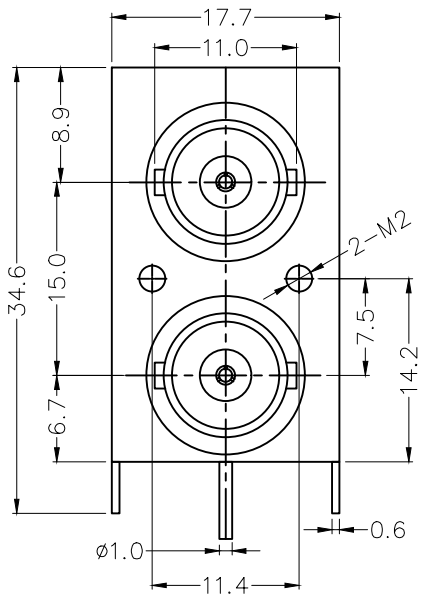

SPECIFICATIONS
 Technical Parameters
 Impedance: 75Ω
 Frequency range: 0~3 GHz
 S.W.R:1.3 Max.
 Voltage rating: 500V Max. r.m.s at sea level
 Insulation Resistance:5000 MΩ Min.
 Temperature Range—Operating: -40°C~+110°C
 Material and Plating
 Body : Zinc Alloy/Nickel plated
 Contact: Brass/Gold plated
 Insulator: POM (UL 94V-0)/White
 Bracket: Steel/Nickel Plated

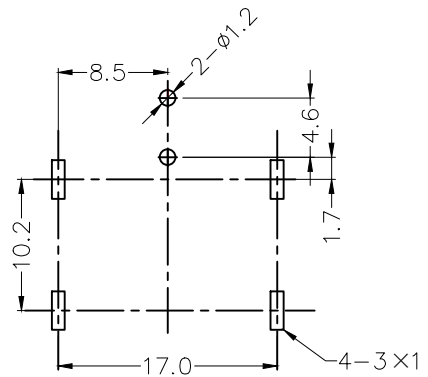

Recommended P.C.Board Layout

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Building Technology Cornerstone</p>
	X. ±0.30	X.* ±5'	LEO	20/APR/24	FO0BNC-J75S0BHD-03	FO0BNC	
DESIGN UNITS METRIC	X.X ±0.20	X.X* ±2'	CHECKED BY	DATE	TITLE	REV 0 SHEET NO. 1/1	
SCALE 5:1	X.XX ±0.15	X.XX* ±1'	GISELLE	20/APR/24	BNC 1X2 Socket 90° Angle(DIP)	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SIZE A4	X.XXX ±0.10	X.XXX* ±0.5'	DRAWN BY	DATE			
			NICK	20/APR/24			

1 2 3 4 5 6 7 8