

A





B

C

D

E

F

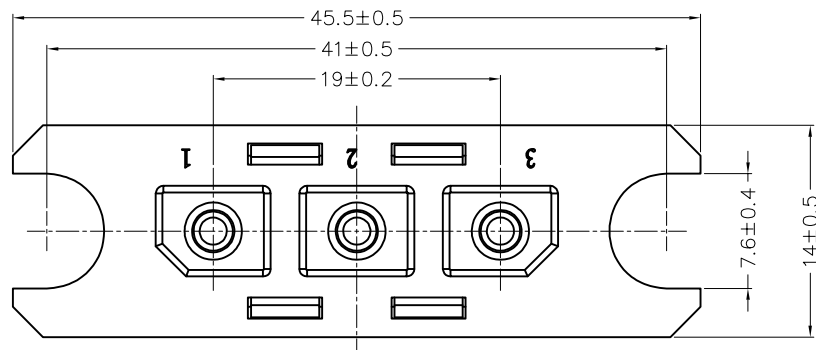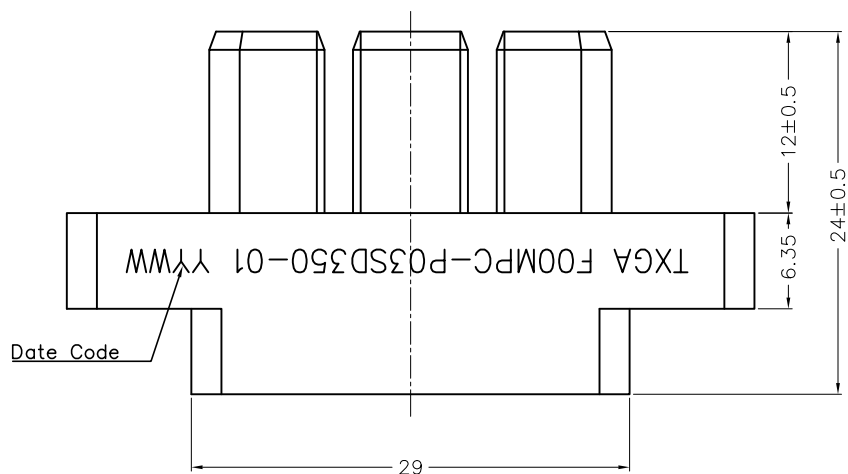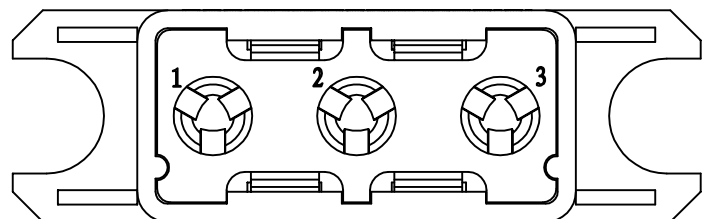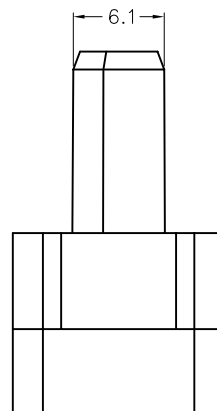

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical

Current Rating: 35A
Voltage Rating: 650V AC/DC
Contact Resistance: 1mΩ Max
Insulation Resistance: 1000 MΩ Min.
Withstanding Voltage: 3000V AC r.m.s
Temperature Range—Operating: -55°C~+125°C

Mechanical


Durability: 500 Cycles

Material and Plating

Housing: PBT (UL 94V-0) ,Black
Pawl spring: Beryllium copper

*Date Code: YYWW

└ Week
└ Year

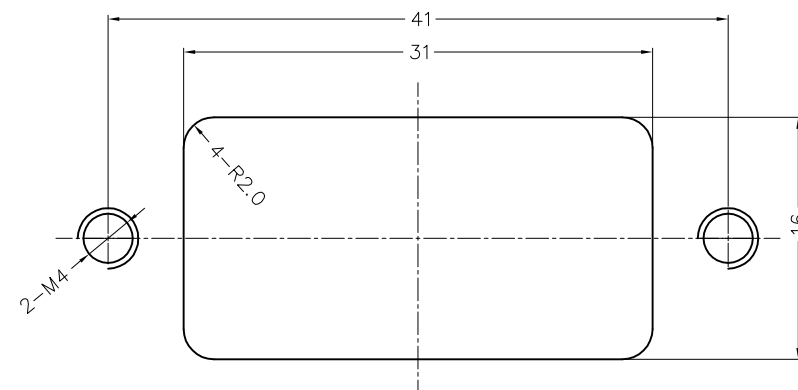

Recommended Panel Layout

<div><div></div><div></div></div> <div>THIRD ANGLE PROJECTION</div>		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 04/JUN/23	PART NO. F00MPC-P03SD350-01	ITEM NO. F00MPC	<div><div>TXGA</div><div>Building Technology Cornerstone</div></div>	
		>120. ±0.50	.X'±5'	CHECKED BY	DATE	TITLE Power Module Connector 3Circuits Plug 35A			
DESIGN UNITS Metric(mm)		30~120 ±0.30	.X'±2"	GISELLE	04/JUN/23			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SCALE 2:1	SIZE A4	6~30 ±0.20	.XX'±1"	DRAWN BY MATT	DATE 04/JUN/23				
		0.5~6 ±0.10	.XXX'±0.5'						