



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

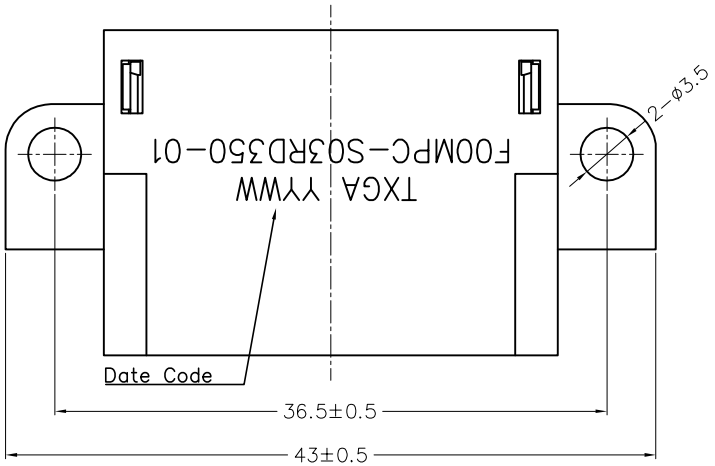

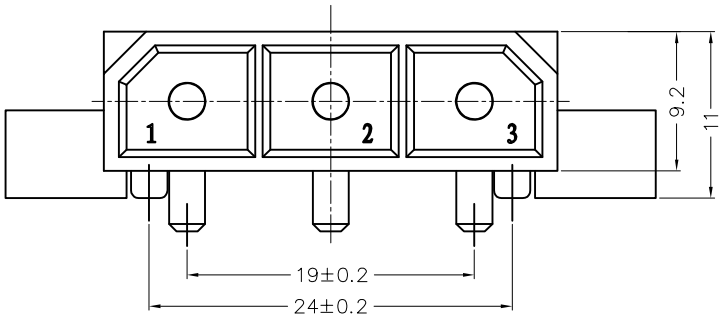

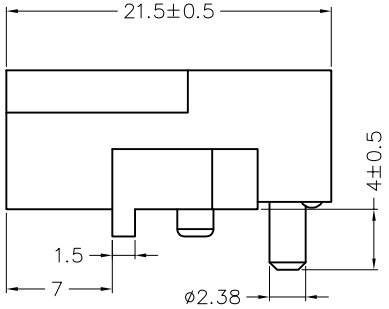

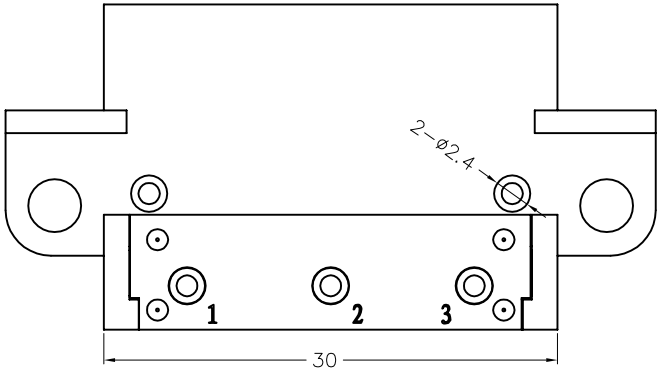


SPECIFICATIONS

Electrical
- Current Rating: 35A
- Voltage Rating: 650V AC/DC
- Contact Resistance: 1mΩ Max
- Insulation Resistance: 1000 MΩ Min.
- Withstanding Voltage: 3000V AC r.m.s
- Temperature Range-Operating: -55℃~+125℃

Mechanical
- Durability: 500 Cycles

Material and Plating
- Housing: PBT (UL 94V-0) ,Black
- Contact Terminal: Brass / 1.5 μm Silver Plated
- *Date Code: YYWW
  - WW: Week
  - YY: Year

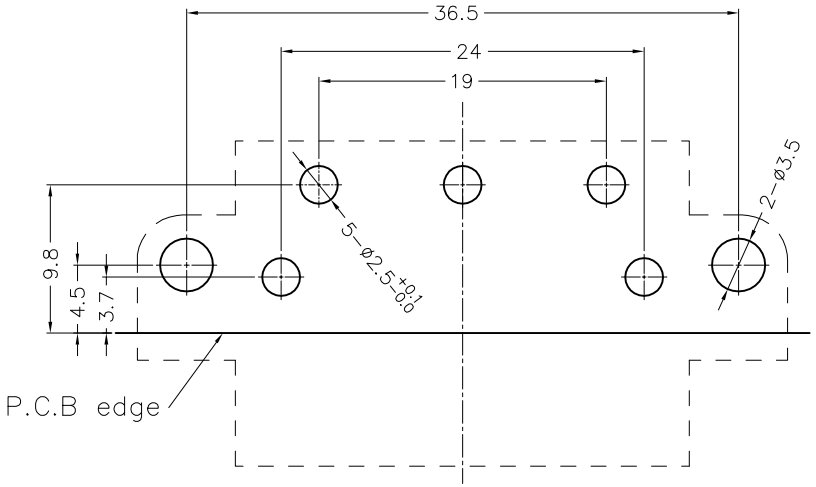

Recommended P.C.Board Layout

General tolerances: ±0.05

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 04/JUN/23	PART NO. F00MPC-S03RD350-01	ITEM NO. F00MPC	TXGA Building Technology Cornerstone
DESIGN UNITS Metric(mm)	>120. ±0.50	X.°±5°	CHECKED BY GISELLE	DATE 04/JUN/23	TITLE Power Module Connector 3Circuits Socket 35A	REV 0	SHEET NO. 2/2
SCALE 2:1	30~120 ±0.30	.X°±2°					
SIZE A4	6~30 ±0.20	.XX°±1°	DRAWN BY MATT	DATE 04/JUN/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	0.5~6 ±0.10	.XXX°±0.5°					