

A

B

C

D

E

F

1

2

3

4

5

6

7

8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD





SPECIFICATIONS

Electrical


Current Rating: 45A
Voltage Rating: 600V AC
Contact Resistance: 1mΩ Max
Insulation Resistance: 3000 MΩ Min.
Withstanding Voltage: 3000V AC r.m.s
Temperature Range—Operating: -55°C~+125°C

Mechanical

Durability: 100 Cycles
Material and Plating
Housing: PBT (UL 94V-0) ,Black
Contact Terminal: Brass / 3~4μm Silver Plated
Board Lock: Phosphor Bronze/ Nickel Plated

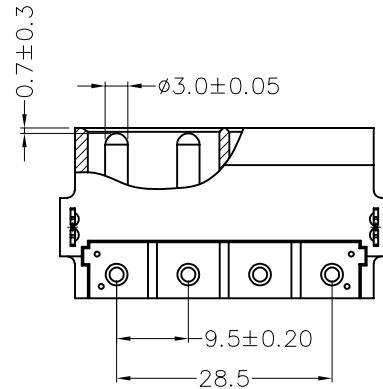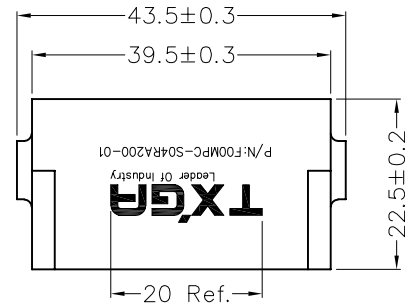

Cabinet panel

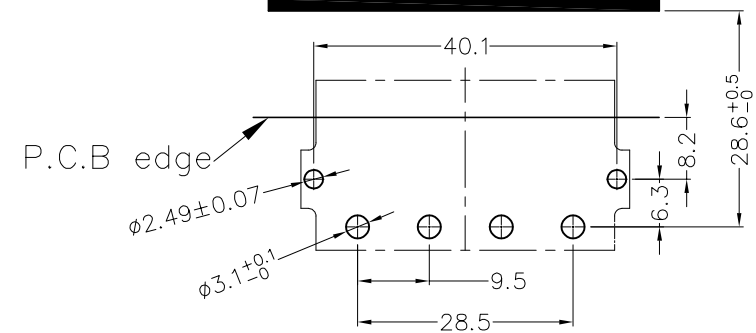

Recommended P.C.Board Layout
General tolerances: ±0.05

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 27/AUG/21	PART NO. F00MPC-S04RA200-01	ITEM NO. F00MPC	 Leader Of Industry		
		X. ±0.30	X.' ±5'	CHECKED BY	DATE	TITLE				
DESIGN UNITS Metric		XX ±0.20	XX' ±2'	CHERRY	27/AUG/21	Charging Pile Module Power Connector 20A AC 4Circuits Socket			REV 0	SHEET NO. 1/1
SCALE 1:1	SIZE A4	XX ±0.15	XX' ±1'	DRAWN BY MATT	DATE 27/AUG/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
		XXX ±0.10	XXX' ±0.5'							

1

2

3

4

5

6

7

8