
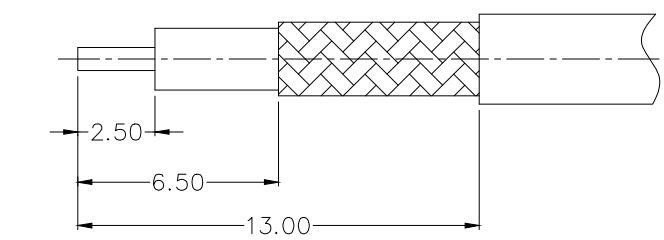
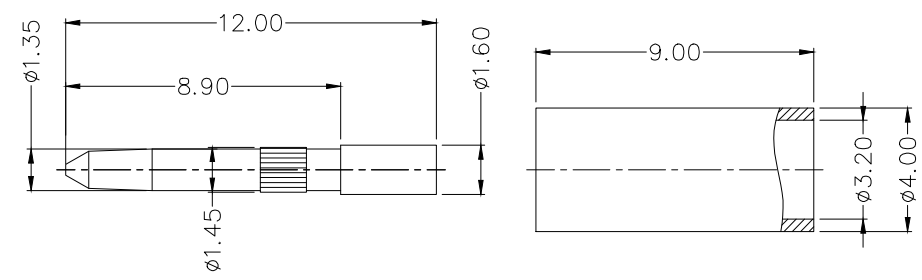


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

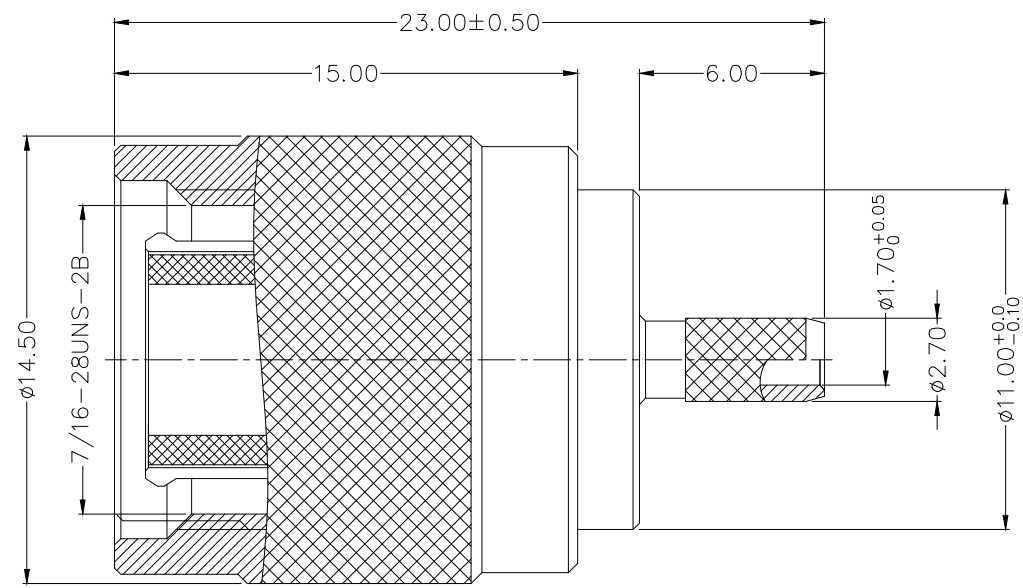

Recommended cable stripping dimensions

SPECIFICATIONS

Technical Parameters

Impedance: 50Ω
Frequency range: 0~6 GHz
Voltage rating: 1000V Max. r.m.s at sea level
Dielectric withstand voltage: 2500V Min. r.m.s at sea level
Temperature Range—Operating: -55°C~+125°C

Mechanical

Durability: 500 cycles

Material and Plating

Body assembly: Brass, 2~3μm Nickel plated
Contact: Brass, 0.2μm Gold plated
Insulator: PTFE (UL 94V-0), White
Gasket: Silicone rubber, Red
Crimp tube: Brass, 0.1μm Gold plated

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 03/AUG/21	PART NO. FO0TNC-P50POSSP-01	ITEM NO. FO0TNC	 Leader Of Industry	
DESIGN UNITS Metric		X. ±0.30	X.* ±5°	CHECKED BY CHERRY	DATE 03/AUG/21	TITLE TNC Plug 180° Vertical For RG316 & 174 cable		REV 0	SHEET NO. 1/1
		X.X ±0.20	X.X* ±2°						
		SCALE 1:1	SIZE A4	X.XX ±0.15	X.XX* ±1°				
		X.XXX ±0.10	X.XXX* ±0.5°						