
REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical
- Current Rating: 3A
- Contact Resistance: 12 mΩ Max.
- Temperature Range—Operating: −55℃ ~ +125℃

Mechanical
- Durability: 500 Cycles
- Contact Separating Force: 30~200g
- Wire Range: 22 AWG
- Strip Length: 6mm

Material and Plating
- Terminal: Brass/0.08 **μm** Gold Plated,Nickel Plated under over all
- Crown spring: Beryllium Copper/0.08 **μm** Gold Plated

Applicable Pin: OD=ø0.8mm

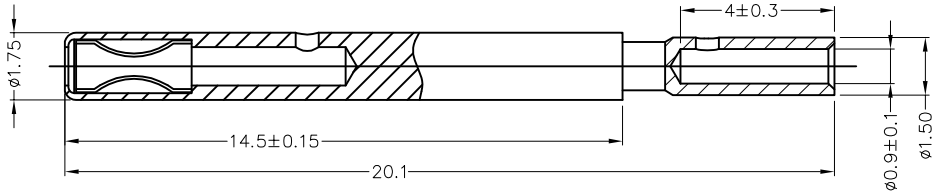

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO. / ITEM NO.
	X.±0.30	X.°±5°	LEO	04/JUN/23	FOCLCT-00801010-01 / FOCLCT
DESIGN UNITS Metric(mm)	X.X±0.20	.X°±2°	CHECKED BY GISELLE	DATE 04/JUN/23	TITLE: Crown Lamella Socket for ø0.8mm Pin
	X.XX±0.15	.XX°±1°	DRAWN BY	DATE	TXGA Building Technology Cornerstone
SCALE 5:1 / SIZE A4	X.XXX±0.10	.XXX°±0.5°	MATT	04/JUN/23	REV 0 / SHEET NO. 1/1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION