REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical
- Current Rating: 35A
- Contact Resistance: 1 mΩ Max.
- Temperature Range–Operating: −55°C ~ +125°C

Mechanical
- Durability: 500 Cycles
- Contact Separating Force: 2.5N~6.5N
- Wire Range: 12AWG

Material and Plating
- Terminal: Brass/1.5 μm Silver Plated
- Crown Lamella: Beryllium Copper/1.5 μm Silver Plated

Applicable Pin: OD=ø2.38mm

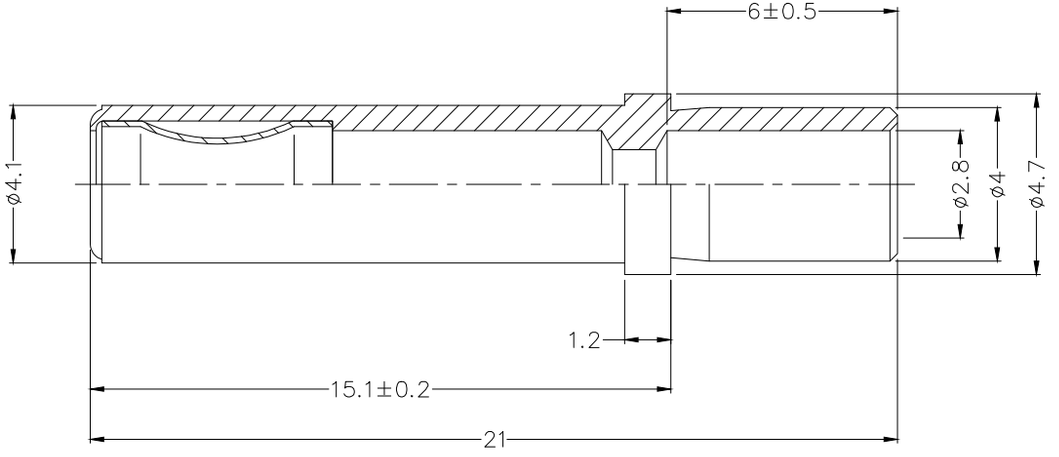

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	TXGA Building Technology Cornerstone
	X. ±0.30	X.° ±5°	LEO	04/JUN/23	FOCLCT-02384190-02	FOCLCT	
DESIGN UNITS mm	X.X ±0.20	X.X° ±2°	CHECKED BY GISELLE	DATE 04/JUN/23	TITLE Charging Pile Module Power Connector, Female Terminal, 35A		REV 0 / SHEET NO. 1/1
	X.XX ±0.15	X.XX° ±1°	DRAWN BY	DATE			
SCALE 5:1 / SIZE A4	X.XXX ±0.10	X.XXX° ±0.5°	PYD	04/JUN/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		