

A

B

C

D

E

F

A

B

C

D

E


F


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
Current Rating: 45A
Contact Resistance: 1.0 mΩ Max.
Temperature Range—Operating: −55°C ~ +125°C
Mechanical
Durability: 100 Cycles
Contact Separating Force: 3N~6N
Wire Range: 7~8 AWG (8~10mm²)
Strip Length: 13mm
Material and Plating
Terminal: Tellurium Copper/3 μm Silver Plated
Crown Lamella: Beryllium Copper/3 μm Silver Plated

Applicable Pin: OD=ø3.0mm

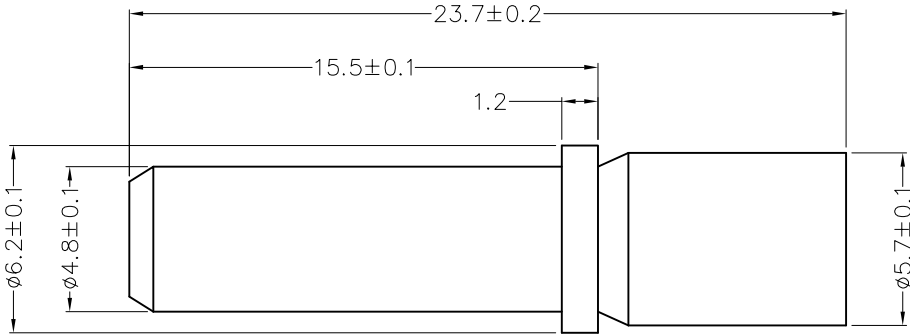

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 27/AUG/21	PART NO. FOCLCT-03004120-01	ITEM NO. FOCLCT	 Leader Of Industry	
		X. ±0.30	X.' ±5°	CHECKED BY CHERRY	DATE 27/AUG/21	TITLE Crown Lamella Socket			
DESIGN UNITS Metric		X.X ±0.20	X.X' ±2°	DRAWN BY MATT	DATE 27/AUG/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XX ±0.15	X.XX' ±1°						
SCALE 1:1	SIZE A4	X.XXX ±0.10	X.XXX' ±0.5°				REV 0	SHEET NO. 1/1	