

A

B

C

D

E

F

A

B

C

D

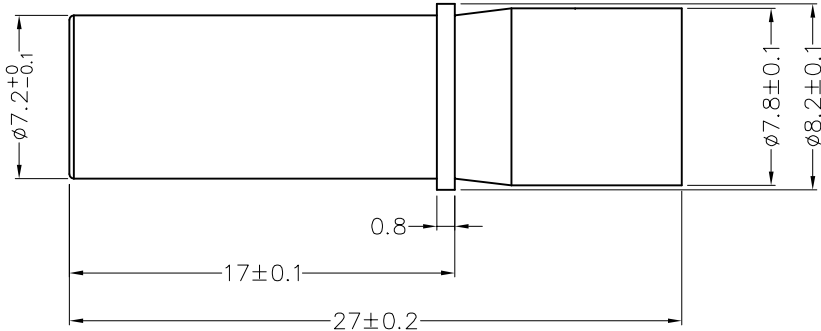
E



F

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical  
Current Rating: 75A  
Contact Resistance: 0.5 mΩ Max.  
Temperature Range—Operating: −55°C ~ +125°C  
Mechanical  
Durability: 100 Cycles  
Contact Separating Force: 4N~10N  
Wire Range: 6AWG (13.3mm²)  
Strip Length: 14mm  
Material and Plating  
Terminal: Tellurium Copper/3 μm Silver Plated  
Crown Lamella: Beryllium Copper/3 μm Silver Plated  
Applicable Pin: OD=ø5.0mm



 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 27/AUG/21	PART NO. FOCLCT-05004120-01	ITEM NO. FOCLCT	 Leader Of Industry	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Crown Lamella Socket			
DESIGN UNITS Metric		X.X ±0.20	X.X* ±2°	CHERRY	27/AUG/21			REV 0	
		X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE				
SCALE 1:1	SIZE A4	X.XXX ±0.10	X.XXX* ±0.5°	MATT	27/AUG/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			