
REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

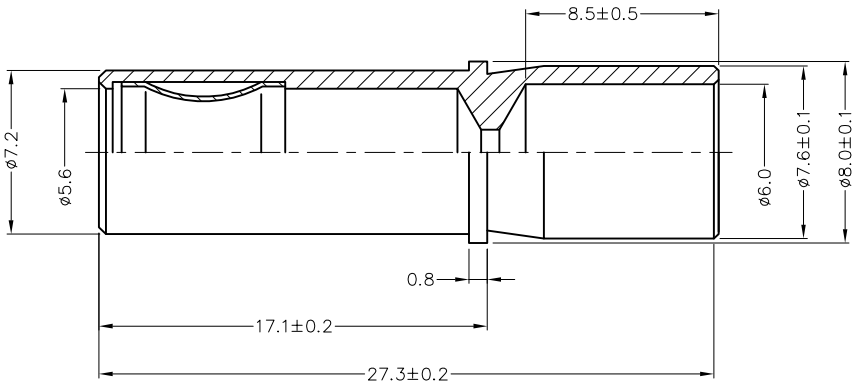

Electrical
- Current Rating: 85A
- Contact Resistance: 1.0 mΩ Max.
- Temperature Range—Operating: −55℃ ~ +125℃

Mechanical
- Durability: 500 Cycles
- Contact Separating Force: 4N~11N
- Wire Range: 6AWG
- Strip Length: 14mm

Material and Plating
- Terminal: Brass/1.5 **µm** Silver Plated
- Crown spring: Beryllium Copper/1.5 **µm** Silver Plated

Applicable Pin: OD=ø5.0mm

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 04/JUN/23	PART NO. FOCLCT-05004190-01 / ITEM NO. FOCLCT
DESIGN UNITS Metric(mm)	X.±0.30	X.°±5°	CHECKED BY GISELLE	DATE 04/JUN/23	TITLE Crown Lamella Socket for ø5.0mm Pin
	X.X±0.20	.X°±2°			
SCALE 4:1 / SIZE A4	X.XX±0.15	.XX°±1°	DRAWN BY MATT	DATE 04/JUN/23	REV 0 / SHEET NO. 1/1
	X.XXX±0.10	.XXX°±0.5°			

TXGA Building Technology Cornerstone

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION