REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD


SPECIFICATIONS

Electrical
- Current Rating: 120A(25 mm² cable)
- Contact Resistance: 0.66 mΩ Max.
- Temperature Range–Operating: −55℃ ~ +125℃

Mechanical
- Durability: 500 Cycles
- Contact Separating Force: 7.6N~13.6N
- Wire Range: 4AWG

Material and Plating
- Terminal: Brass/1.5 μm Silver Plated
- Crown Lamella: Beryllium Copper/1.5 μm Silver Plated

Applicable Pin: OD=ø6.33mm

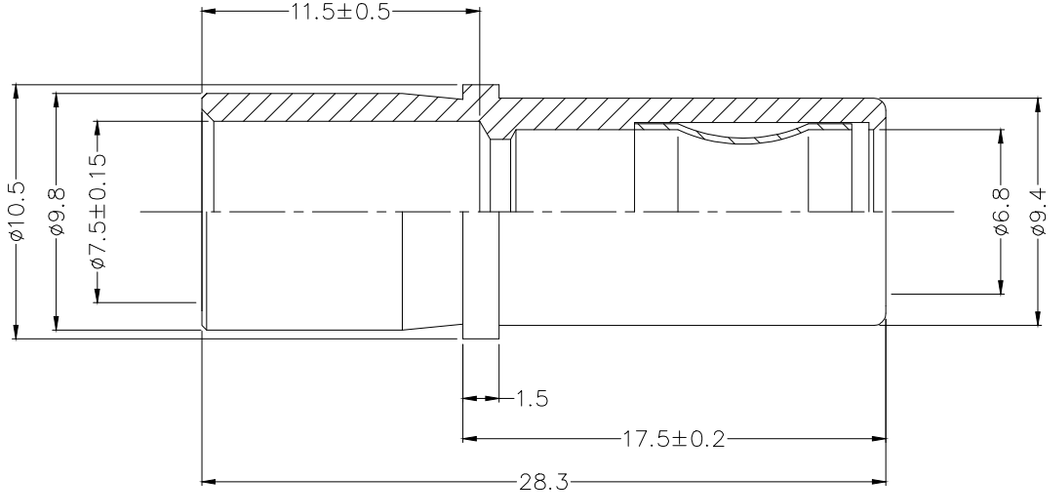

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	TXGA Building Technology Cornerstone
	X. ±0.30	X.° ±5°	LEO	04/JUN/23	FOCLCT-06334190-01	FOCLCT	
DESIGN UNITS mm	X.X ±0.20	X.X° ±2°	CHECKED BY GISELLE	DATE 04/JUN/23	TITLE Charging Pile Module Power Connector, Female Terminal, 120A		REV 0 / SHEET NO. 1/1
SCALE 5:1 / SIZE A4	X.XX ±0.15	X.XX° ±1°	DRAWN BY PYD	DATE 04/JUN/23			
	X.XXX ±0.10	X.XXX° ±0.5°					

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION