

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 1.0A
 Voltage Rating: 300V AC(rms)
 Contact Resistance: 12.5 mΩ Max.
 Insulation Resistance: 5000 MΩ Min.
 Withstanding Voltage: 1000V AC r.m.s
 Temperature Range-Operating: -65°C~+125°C

Mechanical

Durability: 500 Cycles
 Vibration: Frequency 10Hz~2000Hz, Acceleration 147m/s², Discontinuity 1μs Max.
 Shock: Peak acceleration 980m/s², Discontinuity 1μs Max.
 Material and Plating
 Housing: Thermoplastic (UL 94V-0) ,Green
 Terminal: Brass/ Gold Plated

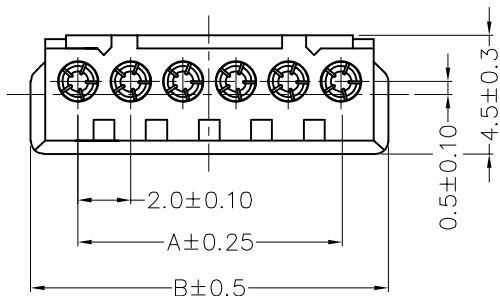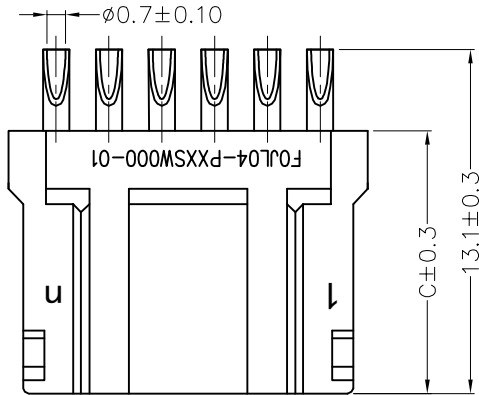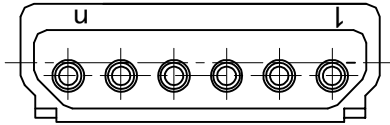

Circuits (n)	Part No.	Dimensions		
		A	B	C
2	FOJL04-P02SW000-01	2.00	5.60	9.0
3	FOJL04-P03SW000-01	4.00	7.60	9.0
4	FOJL04-P04SW000-01	6.00	9.60	9.0
5	FOJL04-P05SW000-01	8.00	11.60	9.0
6	FOJL04-P06SW000-01	10.00	13.60	9.0

Ordering Information

FOJL04 — P XX S W 000 — 01
 1 2 3 4 5

1 Category FOJL04-JL04 2 Type P-Plug 3 Circuits XX 4 Entry Angle S-180° Vertical 5 Wiring Type W-Soldering

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 28/FEB/22	PART NO. FOJL04-PXXSW000-01	ITEM NO. FOJL04	<p>Building Technology Cornerstone</p>	
	X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 28/FEB/22	TITLE JL4 Series Connector Pitch 2mm 180° Vertical			REV 0 SHEET NO. 1/1
	DESIGN UNITS METRIC(mm)	X.X ±0.20	X.X* ±2°	DRAWN BY MATT	DATE 28/FEB/22	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	SCALE 5:1	SIZE A4	X.XX ±0.15					
		X.XXX ±0.10						

1 2 3 4 5 6 7 8