





1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

NOTES

Material
Housing: Thermoplastic (UL 94V-0), Black
Contact: Copper Alloy
Shell: Copper Alloy

Finish
Contact: Gold Flash Plated Over Nickel
Shell: Gold Flash Plated Over Nickel

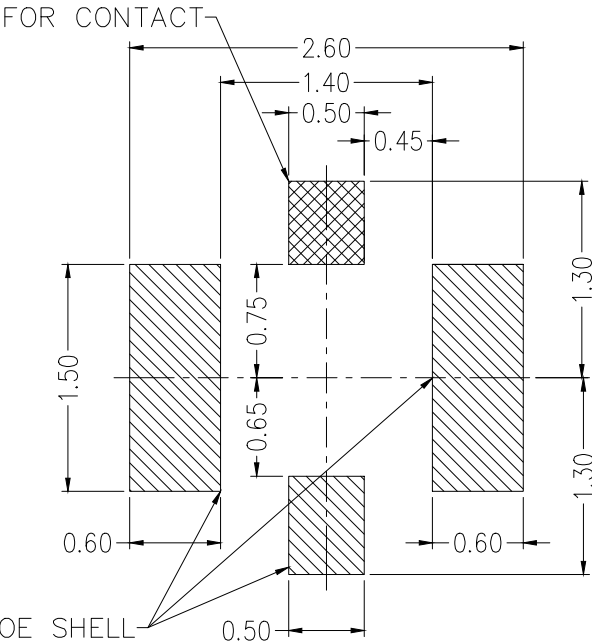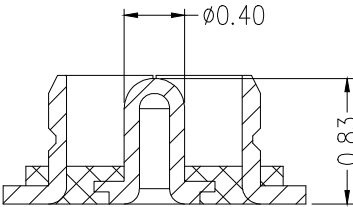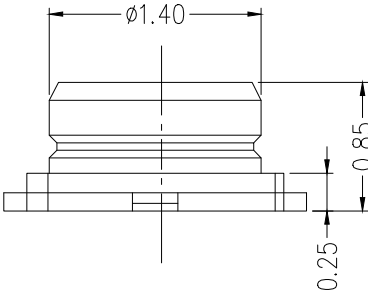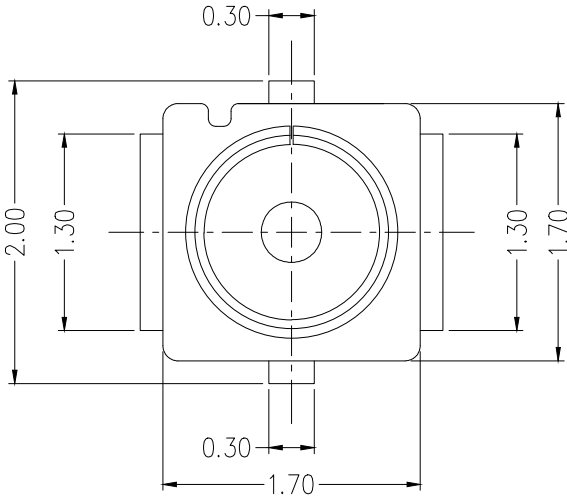

Recommended P.C.Board Layout

A

B

C

D

E

F

A

B

C

D

E





F

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FOMCRF-S50POS0S-04	ITEM NO. FOMCRF	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE MCRF 3rd Coaxial Socket ø1.6mm(H0.85) SMT			
DESIGN UNITS mm		X.X ±0.20	X.X* ±2°	DRAWN BY PYD	DATE 30/JAN/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°						
		X.XXX ±0.10	X.XX* ±0.5°	REV 0 SHEET NO. 1/2					

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:
1.10 sprocket hole cumulative tolerance±0.2
2.Carrier camber is within 1.0mm in 250mm
3.Material: White conductive polystyrene Alloy 100% recyclable
4.All dimensions meet EIA-481-3 requirements
5.Peel off force of cover tape & carrier tape: 20g~130g (0.2N~1.3N)
6.Component load per 7" reel: See table

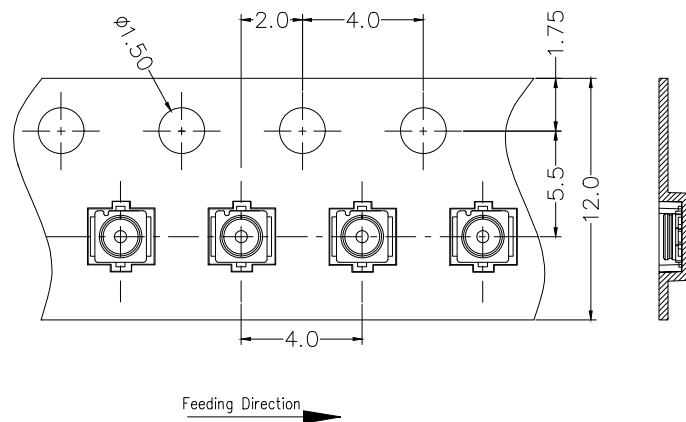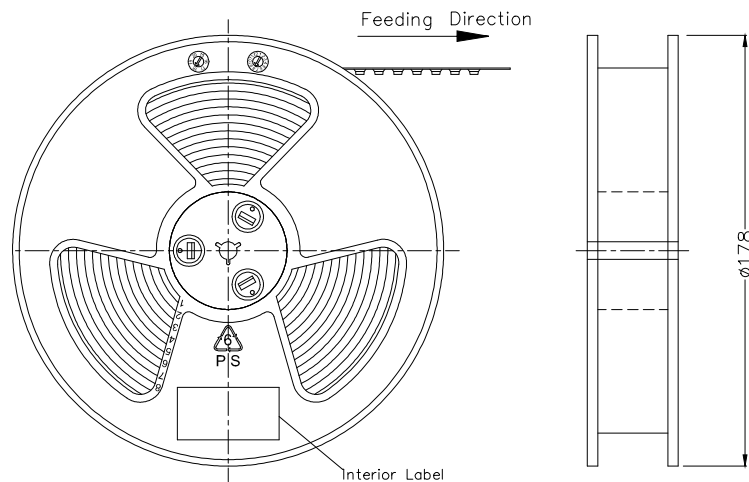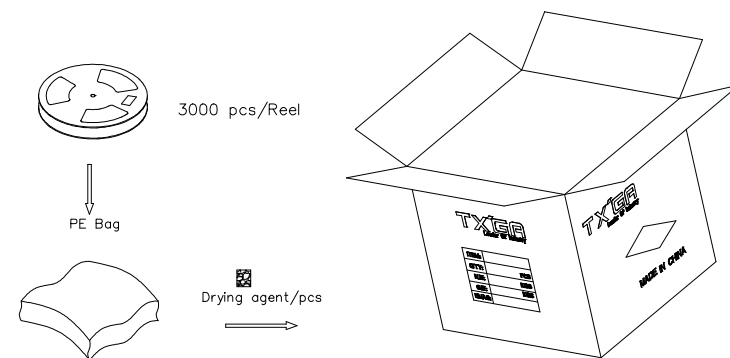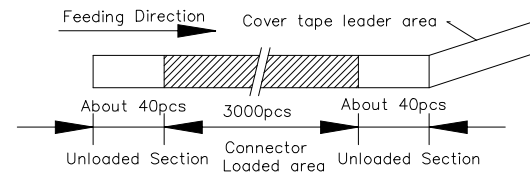

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FOMCRF-S50POS0S-04	ITEM NO. FOMCRF	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5'	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE MCRF 3rd Coaxial Socket ø1.6mm(HO.85) SMT			
DESIGN UNITS mm		XX ±0.20	XX* ±2'		DRAWN BY PYD			DATE 30/JAN/23	REV 0
		XX ±0.15	XX* ±1'						
SCALE 5:1	SIZE A4	XXX ±0.10	XXX* ±0.5'	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					