
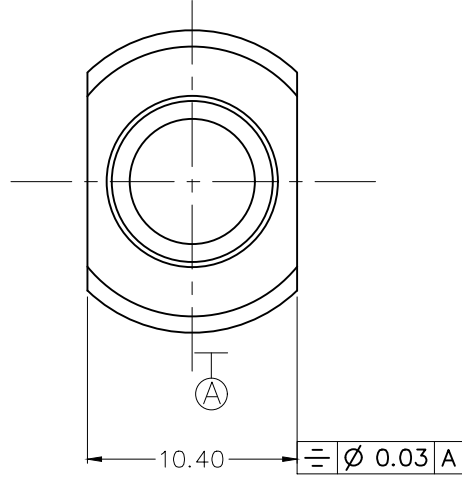


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
 Current rating: 130 A Max.
 Contact resistance: 110 $\mu\Omega$ Max.
 Material and Plating
 Material: Copper alloy
 Plating: 3 μm of silver over 1 μm of nickel
 Mechanical
 Durability: 500 cycles
 Wire range: 25 mm²

* All materials meet the "RoHs"

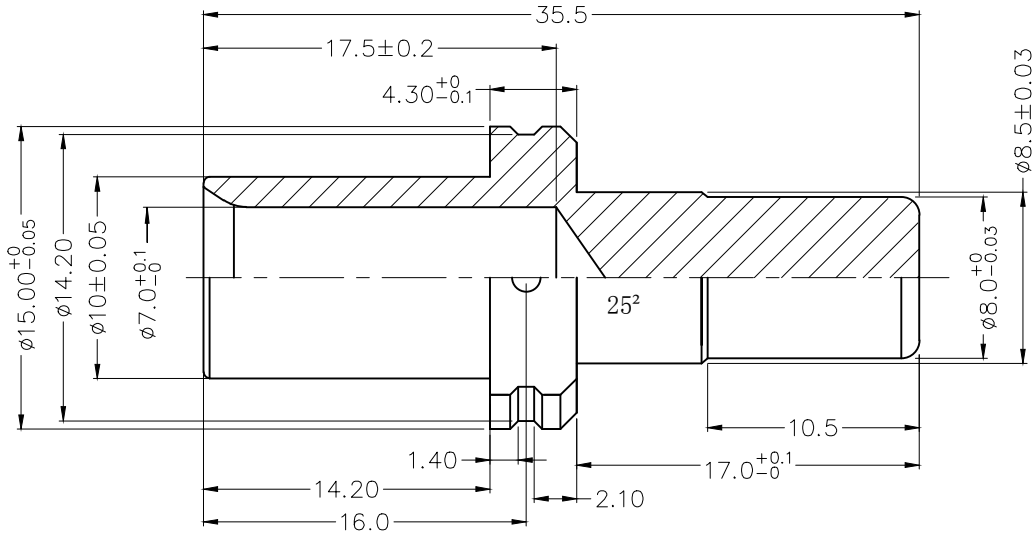

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	X.±0.30	X.'±5°	FRANK	27/OCT/21	FOP0CT-08004120-02	FOP0CT		
	DESIGN UNITS Metric		CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
	X.X±0.20	.X'±2°	CHERRY	27/OCT/21	CONTACT CONNECTOR PIN \varnothing 8mm		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
SCALE 1:1	SIZE A4	X.XX±0.10	.XX'±1°	DRAWN BY	DATE			
		X.XXX±0.05	.XXX'±0.5°	MATT	27/OCT/21			