
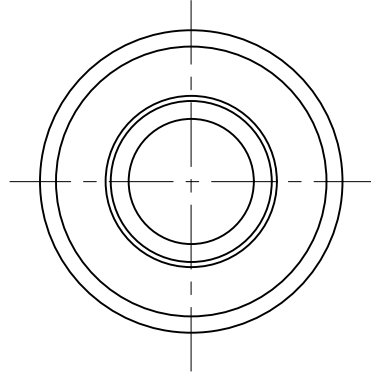


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical  
 Current rating: 160 A Max.  
 Contact resistance: 110  $\mu\Omega$  Max.  
 Material and Plating  
 Material: Copper alloy  
 Plating: 3  $\mu\text{m}$  of silver over 1  $\mu\text{m}$  of nickel  
 Mechanical  
 Durability: 500 cycles  
 Wire range: 35  $\text{mm}^2$

\* All materials meet the "RoHs"

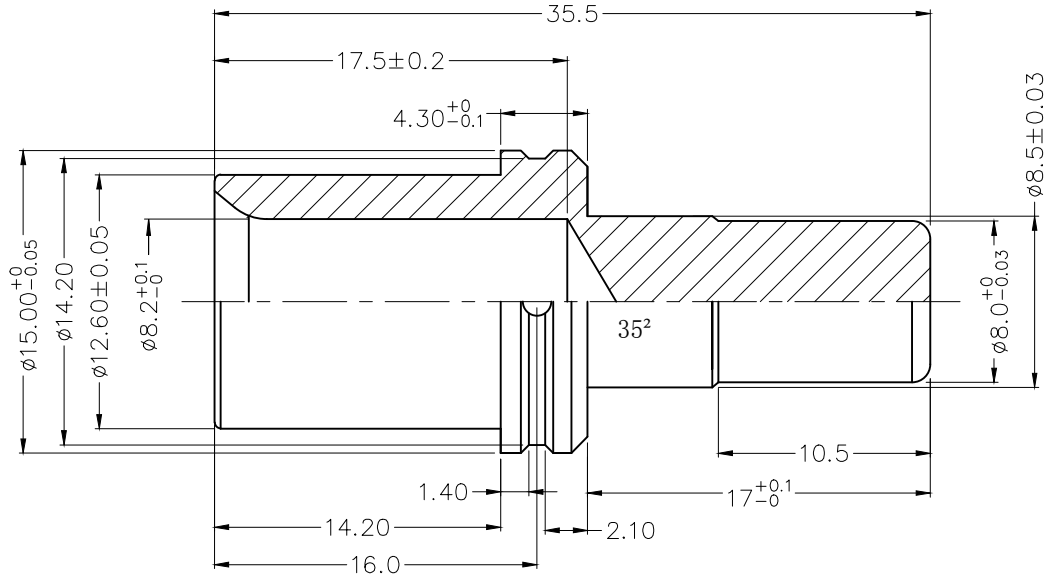

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±0.30	X.±5°	FRANK	27/OCT/21	FOP0CT-08004120-03	FOP0CT	
	X.X±0.20	.X'±2°	CHECKED BY	DATE	TITLE		
	X.XX±0.10	.XX'±1°	CHERRY	27/OCT/21	CONTACT CONNECTOR PIN $\varnothing$ 8mm		
SCALE	SIZE	X.XXX±0.05	.XXX'±0.5°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
1:1	A4			MATT	27/OCT/21	REV 0	SHEET NO. 1/1