
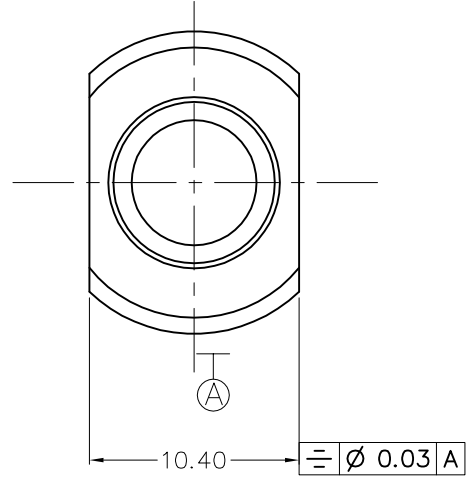


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

SPECIFICATIONS

Electrical
 Current rating: 80 A Max.
 Contact resistance: 110 $\mu\Omega$ Max.
 Material and Plating
 Material: Copper alloy
 Plating: 3 μm of silver over 1 μm of nickel
 Mechanical
 Durability: 500 cycles
 Wire range: 10 mm²

* All materials meet the "RoHs"

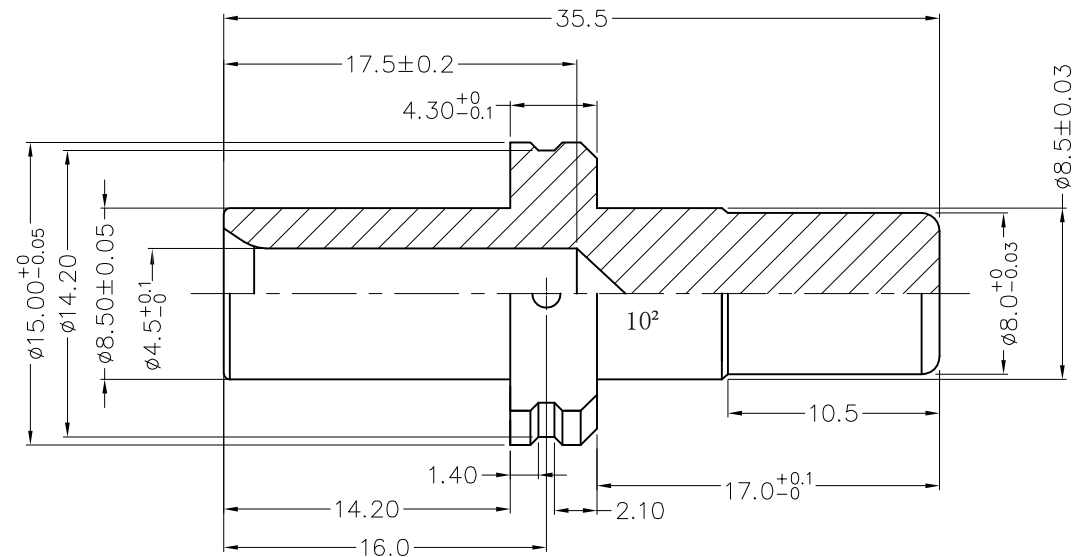

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/MAY/22	PART NO. FOP0CT-08004120-04	ITEM NO. FOP0CT	 Leader Of Industry
	X.±0.30	X.±5°	CHECKED BY CHERRY	DATE 12/MAY/22	TITLE CONTACT CONNECTOR PIN \varnothing 8mm		
	DESIGN UNITS Metric	X.X±0.20	.X'±2°	DRAWN BY MATT	DATE 12/MAY/22	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
	SCALE 1:1	SIZE A4	X.XX±0.10	.XX'±1°		REV 0	SHEET NO. 1/1
		X.XXX±0.05	.XXX'±0.5°				