


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

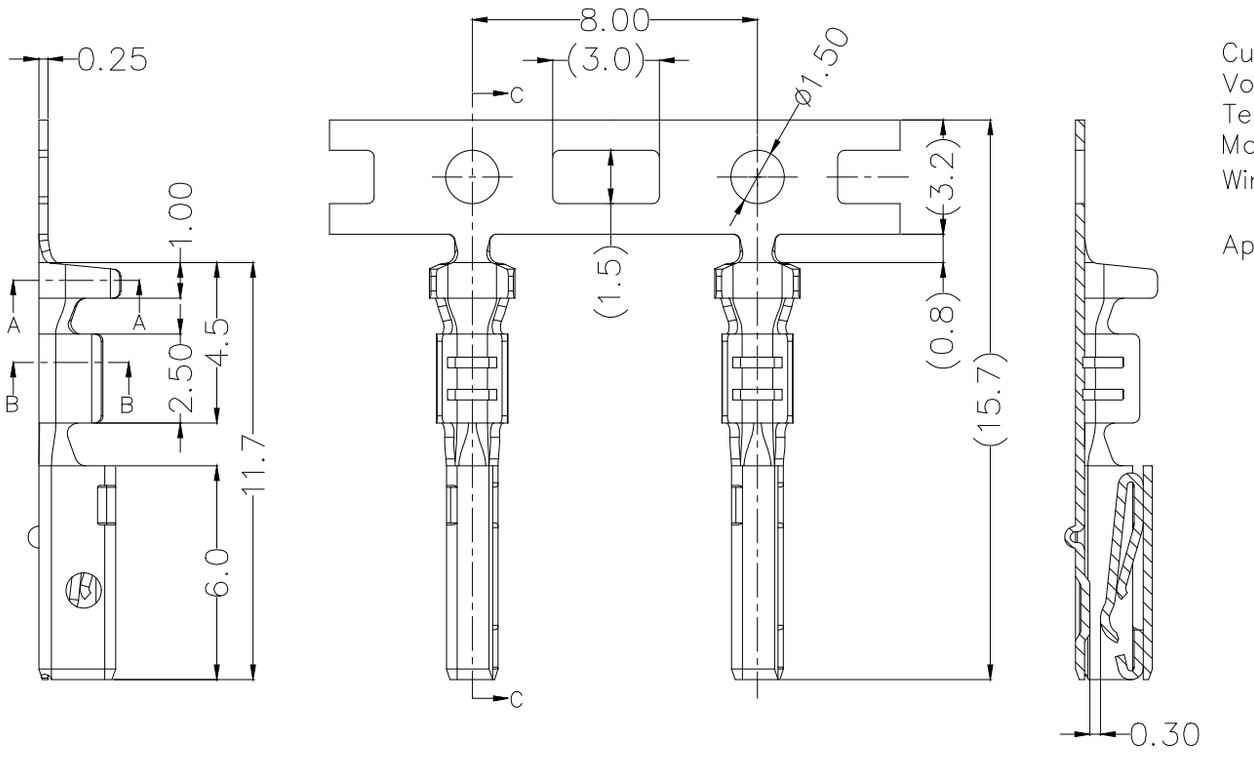


SEC: C–C





SEC: A–A




SEC: B–B


SPECIFICATIONS

Current Rating: 3A (22 AWG)
Voltage Rating: 100V
Temperature Range–Operating: –55℃~+85℃
Material: Phosphor bronze,Tin plated
Wire Range: 0.13~0.33mm²(26AWG~22AWG)
O.D ø1.4~ø1.7mm
Applicable Housing: FAH20004/FAH20006 Series


THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FAT20002-F8H	ITEM NO. FAT20002	TXGA Building Technology Cornerstone
DESIGN UNITS mm	X. ±0.50	X.° ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE Wire Housing Pitch 2mm Pitch 2mm (Terminal)		
	X.X ±0.30	X.X° ±2°				REV 0	SHEET NO. 1/2
SCALE 5:1 SIZE A4	X.XX ±0.20	X.XX° ±1°	DRAWN BY PYD	DATE 30/JAN/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XXX ±0.10	X.XXX° ±0.5°					

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

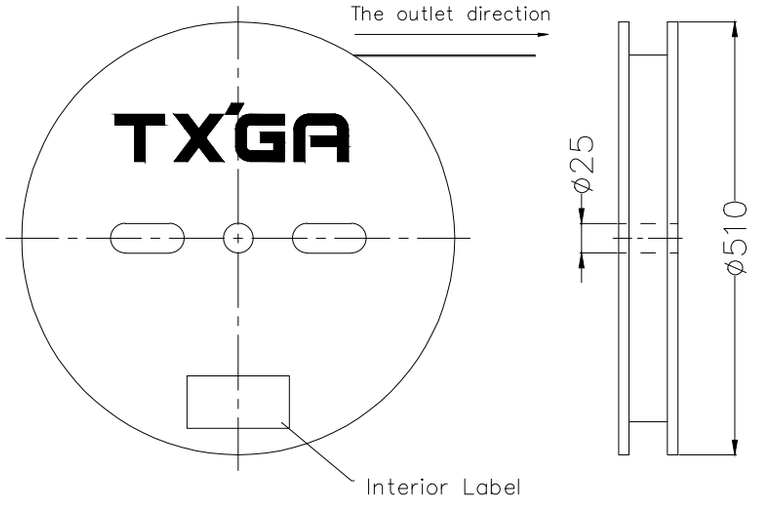



10,000 pcs/Reel

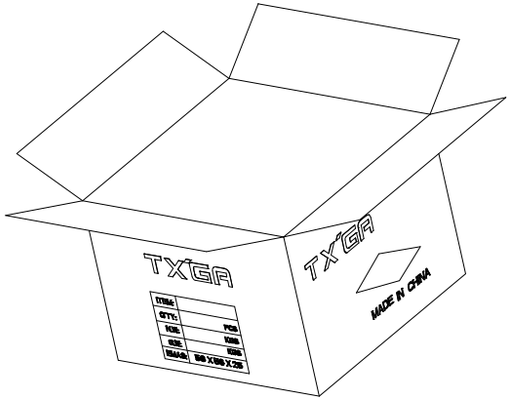

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FAT20002-F8H	ITEM NO. FAT20002	TXGA Building Technology Cornerstone
DESIGN UNITS mm	X. ±0.50	X.° ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE Wire Housing Pitch 2mm Pitch 2mm (Terminal)		
	X.X ±0.30	X.X° ±2°				REV 0	SHEET NO. 2/2
SCALE 5:1 SIZE A4	X.XX ±0.20	X.XX° ±1°	DRAWN BY PYD	DATE 30/JAN/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XXX ±0.10	X.XXX° ±0.5°					