
REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

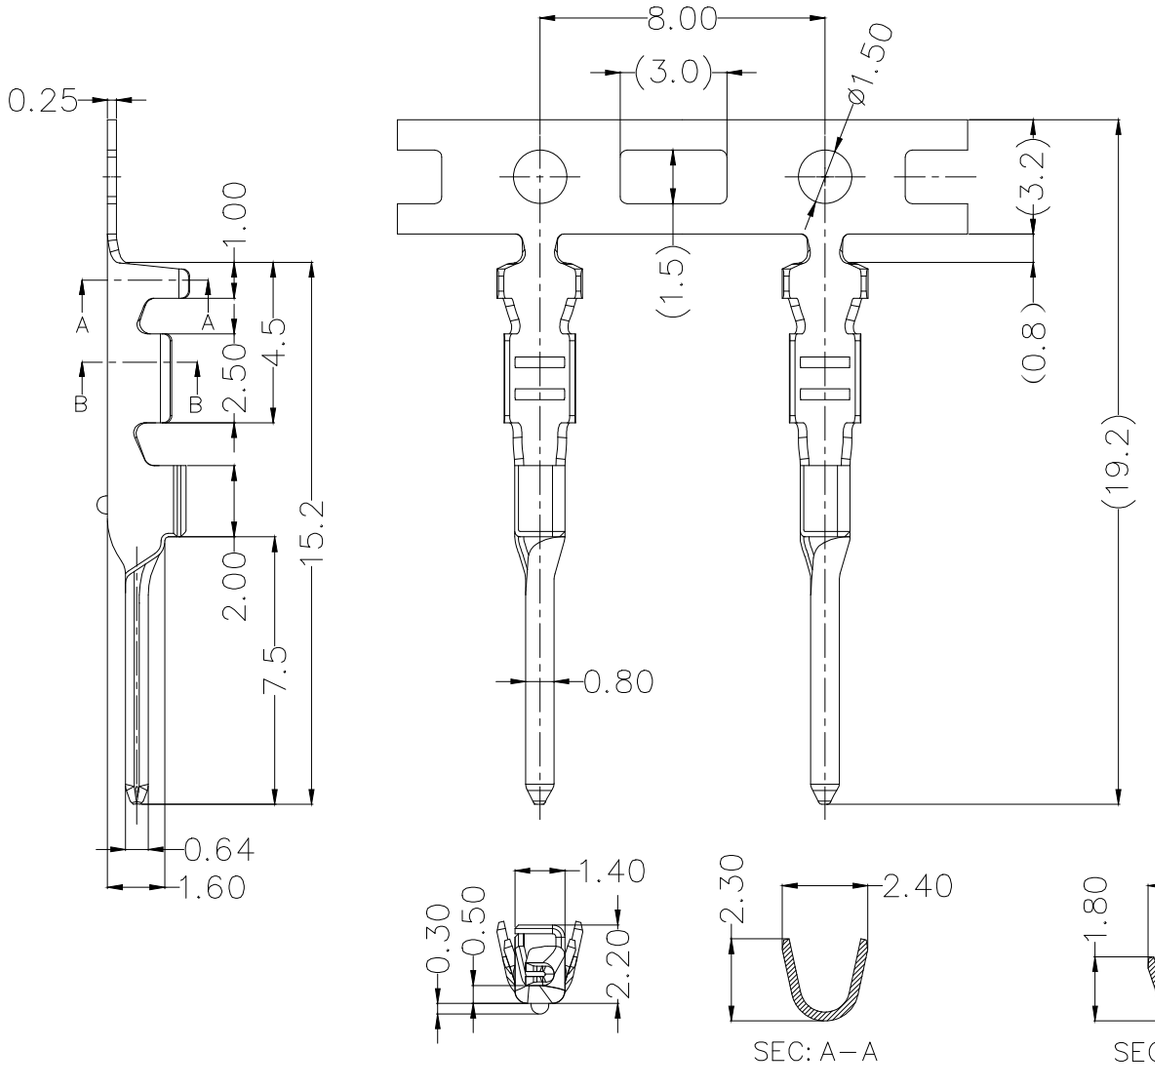


SPECIFICATIONS


Current Rating: 3A (22 AWG)
Voltage Rating: 100V
Temperature Range–Operating: –55°C~+85°C
Material: Phosphor bronze,Tin plated
Wire Range: 0.13~0.33mm²(26AWG~22AWG)
O.D ø1.4~ø1.7mm
Applicable Housing: FAH20003/FAH20005 Series

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FAT20003-M8H	ITEM NO. FAT20003	TXGA Building Technology Cornerstone
DESIGN UNITS mm	X. ±0.50	X.° ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE Wire Housing Pitch 2mm Pitch 2mm (Terminal)		
	X.X ±0.30	X.X° ±2°				REV 0	SHEET NO. 1/2
SCALE 5:1	X.XX ±0.20	X.XX° ±1°	DRAWN BY PYD	DATE 30/JAN/23			
SIZE A4	X.XXX ±0.10	X.XXX° ±0.5°					


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

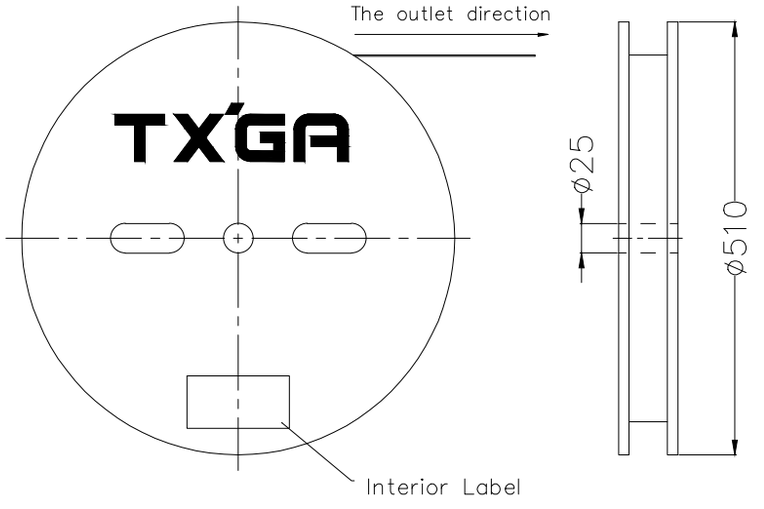



10,000 pcs/Reel

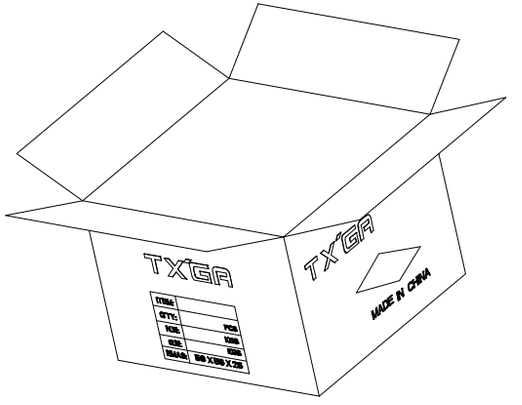

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 30/JAN/23	PART NO. FAT20003-M8H	ITEM NO. FAT20003	TXGA Building Technology Cornerstone
DESIGN UNITS mm	X. ±0.50	X.° ±5°	CHECKED BY GISELLE	DATE 30/JAN/23	TITLE Wire Housing Pitch 2mm Pitch 2mm (Terminal)		REV 0 / SHEET NO. 2/2
SCALE 5:1 / SIZE A4	X.X ±0.30	X.X° ±2°					
	X.XX ±0.20	X.XX° ±1°	DRAWN BY PYD	DATE 30/JAN/23			
	X.XXX ±0.10	X.XXX° ±0.5°					

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION