

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD




SPECIFICATIONS

Electrical

Current Rating: 1A AC(rms)/DC
Voltage Rating: 12V AC(rms)/DC
Contact Resistance: 50 mΩ Max
Insulation Resistance: 100 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -20°C~+70°C
Life Test: 200 Cycles Min
Force: 60~80g at Working Height.

Material And Plating

Material: Stainless Steel
Plating: 1u" Gold Plated Over 50~80u" Nickel

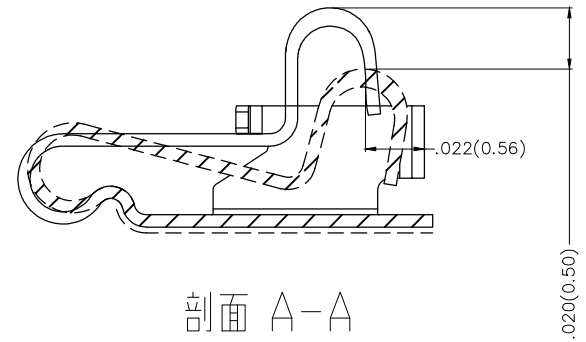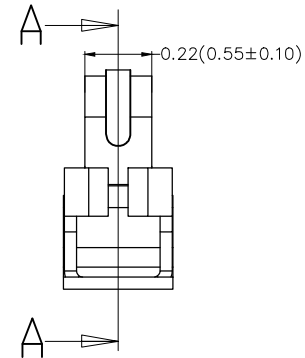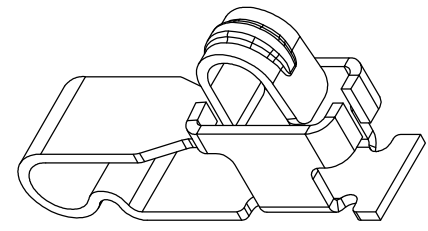


剖面 A-A

Ordering Information

FBA 000 01 — S 01 S 1 01 0 M
1 2 3 4 5 6 7 8 9 10

1	Category FBA—Battery Holder	2	Series Number 000	3	Distinction No. 01	4	Contact Alignment S—Single Row	5	Circuits 01
6	Entry Angle S—Vertical	7	Plating 1—Gold Plated	8	Thickness of Plating 01—1u"	9	Material—Resin 0—NON	10	Packaging M—Reel

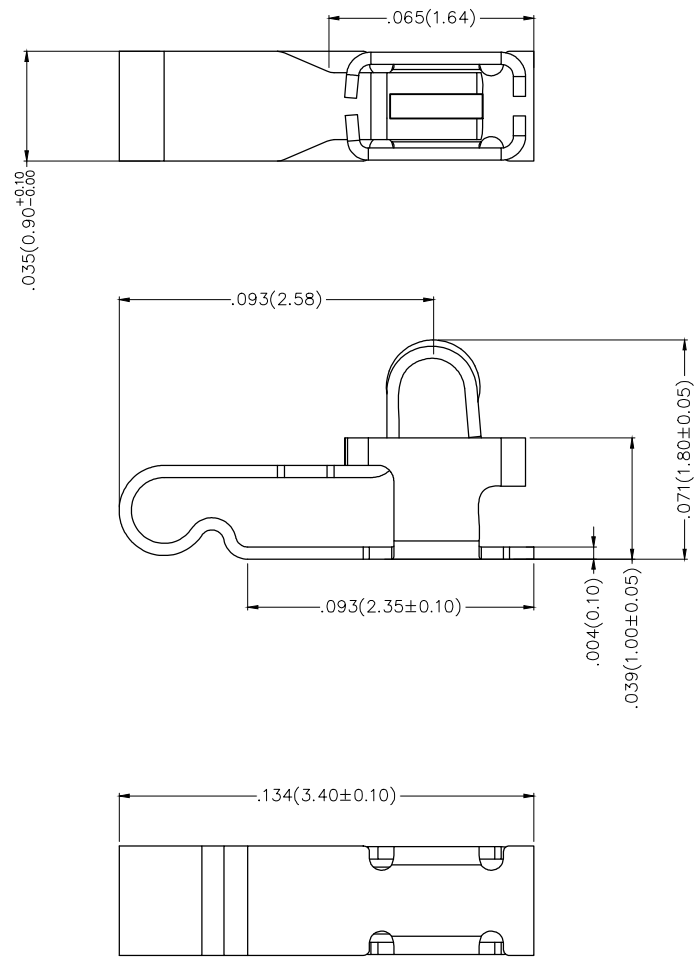

Recommended P.C.Board Layout

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 18/JUN/13	PART NO. FBA00001-S01S1010M	ITEM NO. FBA00001	<p>Leader Of Industry</p>
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 18/JUN/13	TITLE Battery Holder's Terminal		
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	X.±2'	DRAWN BY KATE	DATE 18/JUN/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	SIZE A4	X.XX±.006(0.15)					
		X.XXX±.004(0.10)					