
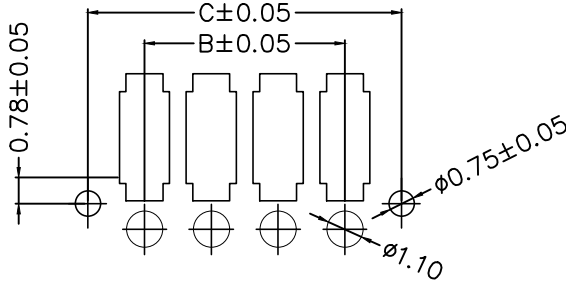





REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD



Recommended P.C.Board Layout  
General tolerances:±0.05

SPECIFICATIONS

Electrical  
 Current Rating: 3A AC(rms)/DC  
 Voltage Rating: 30V AC(rms)/DC  
 Contact Resistance: 30 mΩ Max  
 Insulation Resistance: 1000 MΩ Min  
 Withstanding Voltage: 1000V AC r.m.s  
 Operating Temperature: -40°C~+105°C  
 Material and plating  
 Housing: PA9T (UL 94V-0)  
 Contacts: Phosphor Bronze/Gold plated

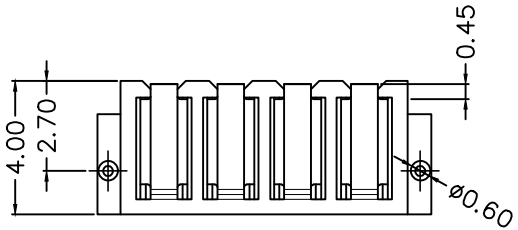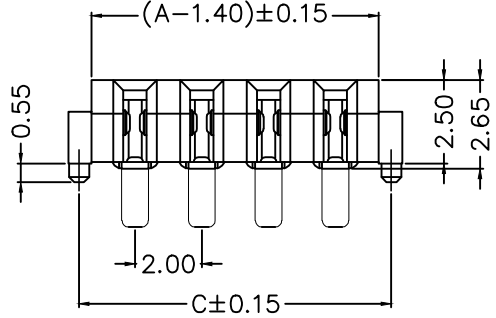

Ordering Information

FBA 200 11 — S XX B 1 XX 5 B  
 1 2 3 4 5 6 7 8 9 10

1	Category FBA-Battery Holder	2	Series Number 200-Pitch2.00mm	3	Distinction No. 11	4	Row Option S-Single Row	5	Circuits XX
6	Entry Angle B-90° Angle	7	Plating 1-Gold plated	8	Thickness of Plating 00-Gold Flash	9	Material-Resin 5-PA9T	10	Packaging B-Bag

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED) X. ±0.30 X.* ±5° X.X ±0.20 X.X* ±2°		APPROVE BY LEO	DATE 19/Sept/23	PART NO. FBA20011-SXXB1XX5B	ITEM NO. FBA20011	<p>Building Technology Cornerstone</p>
	DESIGN UNITS mm	X.XX ±0.15 X.XX* ±1° X.XXX ±0.10 X.XXX* ±0.5°	CHECKED BY GISELLE	DATE 19/Sept/23	TITLE Battery Connecdor Pitch 2.0mm 90° Angle(DIP+SMT)		
SCALE 5:1	SIZE A4	DRAWN BY Hejianpeng	DATE 19/Sept/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

A

A

B

B

C

C

D

D



E

E

F

F

Circuits (n)	Part NO.	Dimensions		
		A	B	C
03	FBA20011-S03B1XX5B	8.00	4.00	7.35
04	FBA20011-S04B1XX5B	10.00	6.00	9.35
05	FBA20011-S05B1XX5B	12.00	8.00	11.35
06	FBA20011-S06B1XX5B	14.00	10.00	13.35
07	FBA20011-S07B1XX5B	16.00	12.00	15.35
08	FBA20011-S08B1XX5B	18.00	14.00	17.35

 <b>THIRD ANGLE PROJECTION</b>	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b>		<b>APPROVE BY</b> LEO	<b>DATE</b> 19/Sept/23	<b>PART NO.</b> FBA20011-SXXB1XX5B	<b>ITEM NO.</b> FBA20011	 <b>Building Technology Cornerstone</b>	
	X. ±0.30	X.* ±5°	<b>CHECKED BY</b> GISELLE	<b>DATE</b> 19/Sept/23	<b>TITLE</b> Battery Connector Pitch 2.0mm 90° Angle(DIP+SMT)			REV 0
	<b>DESIGN UNITS</b> mm	X.X ±0.20	X.X* ±2°	<b>DRAWN BY</b> Hejianpeng	<b>DATE</b> 19/Sept/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
<b>SCALE</b> 5:1	<b>SIZE</b> A4	X.XX ±0.15	X.XX* ±1°					
		X.XXX ±0.10	X.XXX* ±0.5°					

1 2 3 4 5 6 7 8