

A

B

C

D

E

F

1

2

3

4

5

6

7






8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:


1. 10 sprocket hole cumulative tolerance ± 0.2
2. Carrier camber is within 1mm in 100mm
3. Material: Transparent Conductive polystyrene Alloy 100% recyclable
4. All dimensions meet EIA-481-3 requirements
5. Component load per 13" reel: 5,000 pcs

Circuits (n)	Dimensions	
	W	F
10~30	16.0	7.5
40	24.0	11.5

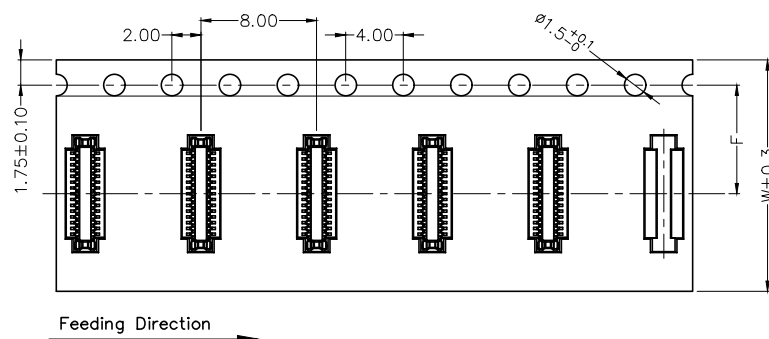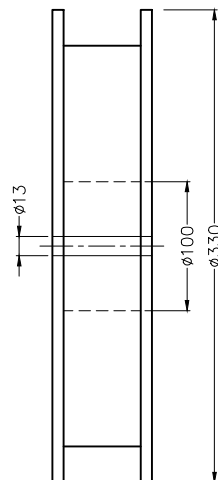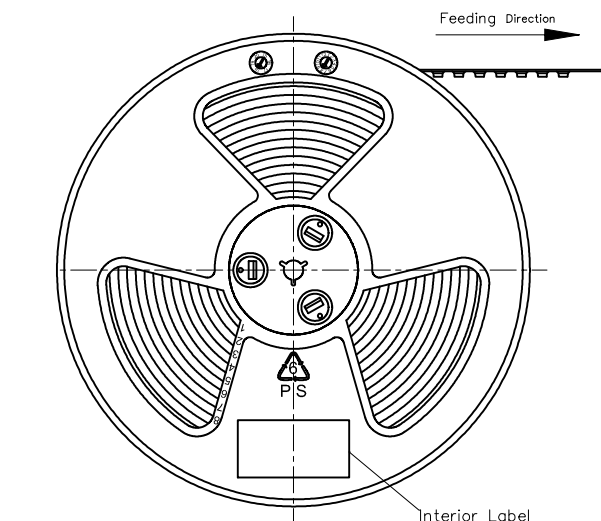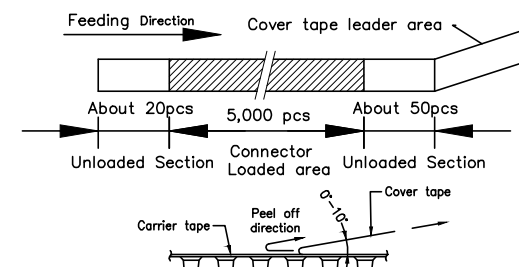


PE Bag

5,000 pcs/Reel



Drying agent/pcs

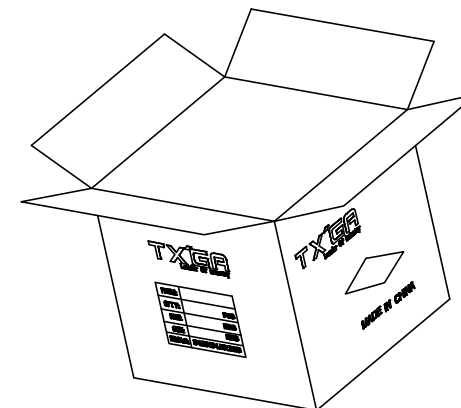

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY LEO	DATE 25/AUG/23	PART NO. FBB04009-MXXS1143BKM	ITEM NO. FBB04009	 Building Technology Cornerstone	
		X. ±0.30	X.* ±5°	CHECKED BY	DATE	TITLE Board to Board Pitch 0.4mm 180° Vertical (SMT)			
DESIGN UNITS METRIC (mm)		X.X ±0.20	X.X* ±2°	GISELLE	25/AUG/23				
SCALE 5:1	SIZE A4	X.XX ±0.15	X.XX* ±1°	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX ±0.10	X.XXX* ±0.5°	KATE	25/AUG/23				