
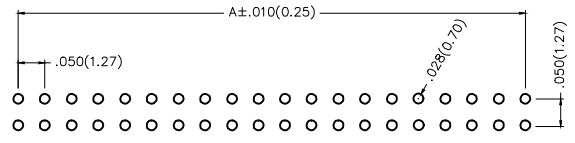


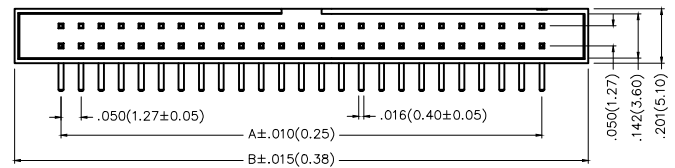


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Electrical  
 Current Rating: 1.0A AC(rms)/DC  
 Voltage Rating: 250V AC(rms)/DC  
 Contact Resistance: 20 mΩ Max  
 Insulation Resistance: 1000 MΩ MIN  
 Withstanding Voltage: 500V AC r.m.s  
 Temperature Range—Operating: -40°C~+85°C  
 Material and Plating  
 Housing: PA9T (UL94V-0)  
 Contact Pin: Brass  
 Plating: Gold Plated

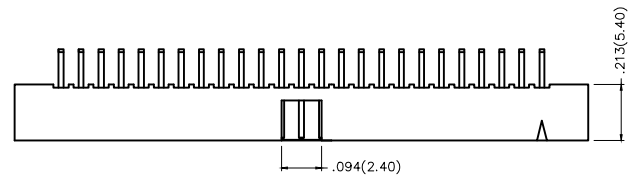


Recommended P.C.Board Layout

### Ordering Information

FBH 127 11 — D XX B 1 XX 4 K6 K  
 1 2 3 4 5 6 7 8 9 10 11

1	Category FBH—Box Header	2	Series Number 127—Pitch 1.27mm	3	Distinction No. 11	4	Row Option D—Double Row	5	Circuits XX		
6	Entry Angle B—90° Angle	7	Plating 1—Gold Plated	8	Thickness of Plating 00—Gold Flash 05—5μ" Custom plate available	9	Material—Resin 4—PA9T	10	Color—Resin K6—Black	11	Packaging K—Tray

Circuits (n)	Part No.	Dimensions(in/mm)		Circuits (n)	Part No.	Dimensions(in/mm)	
		A	B			A	B
10	FBH12711-D10B1XX4K6K	.200(5.08)	.498(12.65)	30	FBH12711-D30B1XX4K6K	.700(17.78)	.998(25.35)
14	FBH12711-D14B1XX4K6K	.300(7.62)	.598(15.19)	34	FBH12711-D34B1XX4K6K	.800(20.32)	1.098(27.89)
16	FBH12711-D16B1XX4K6K	.350(8.89)	.648(16.46)	40	FBH12711-D40B1XX4K6K	.950(24.13)	1.248(31.70)
20	FBH12711-D20B1XX4K6K	.450(11.43)	.748(19.00)	50	FBH12711-D50B1XX4K6K	1.200(30.48)	1.516(38.50)
24	FBH12711-D24B1XX4K6K	.550(13.97)	.848(21.54)	60	FBH12711-D60B1XX4K6K	1.450(36.83)	1.748(44.40)
26	FBH12711-D26B1XX4K6K	.600(15.24)	.898(22.81)				

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FBH12711-DXXB1XX4K6K	ITEM NO. FBH12711	 Leader Of Industry
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 19/JUL/13			
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X'±2'	DRAWN BY JACOB	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SCALE 5:1	X.XX±.006(0.15)	.XX'±1'					