

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Finish change	16/JUN/17	VANDY	FRANK
2	△	Add the "TXGA" logo	29/OCT/18	KATE	ANDY
3	△	Change the Structure and size	30/SEP/20	KATE	CHERRY

SPECIFICATIONS:

Electrical

- Current Rating: 0.5A AC(rms)/DC
- Voltage Rating: 50V AC(rms)/DC
- Contact Resistance: 100 mΩ Max
- Insulation Resistance: 1000 MΩ Min
- Withstanding Voltage: 500V AC r.m.s
- Temperature Range-Operating: -20°C~+85°C

Mechanical

Durability: 5,000 cycles

Material and Plating

Housing: Thermoplastic (UL 94V-0) Black






△ Contact: Copper Alloy/

Gold flash on contact area, tin on tail


Shell: Stainless Steel/

Nickel plated overall, gold flash on solder area

Durability: 5000~10000 Times

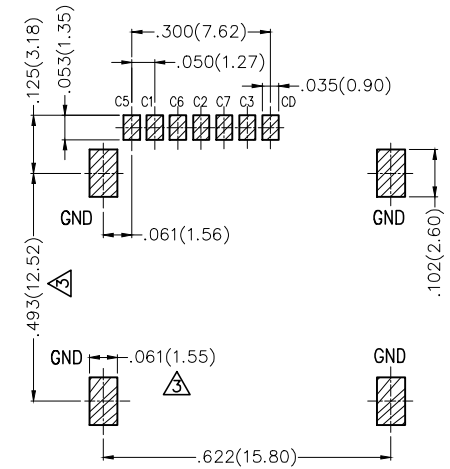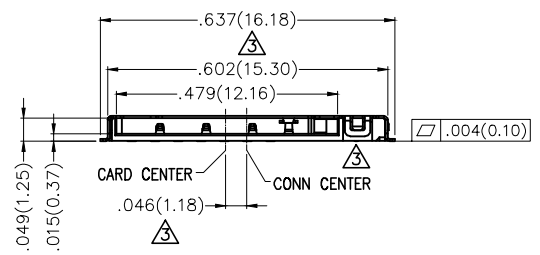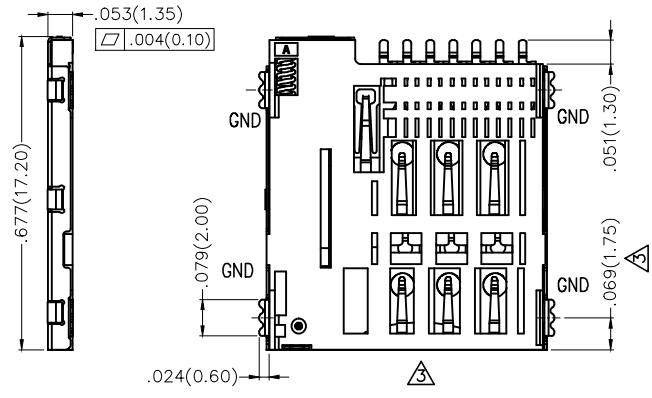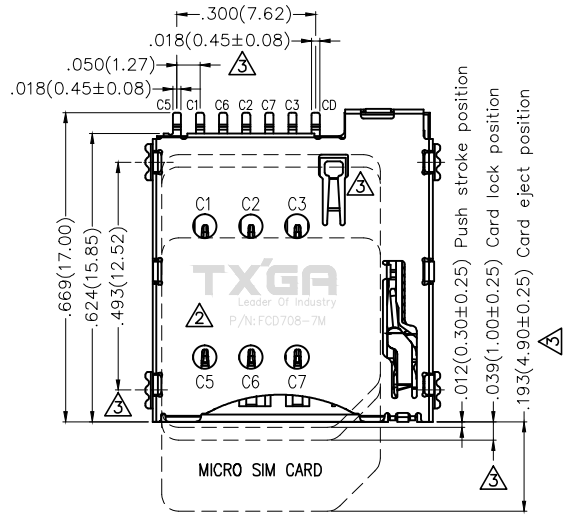

Pin No.	Pin Assignment
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

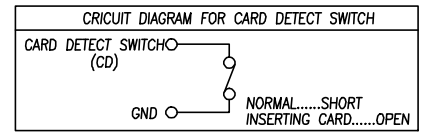

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/SEP/16	PART NO. FCD708-7M	ITEM NO. FCD708	 Leader Of Industry	
	X.±.012(0.30)	X.±5'	CHECKED BY CHERRY	DATE 12/SEP/16	TITLE SIM card connector(H:1.35mm)			REV 3
	X.X±.008(0.20)	.X±2'	DRAWN BY VERNON	DATE 12/SEP/16	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
	X.XX±.006(0.15)	.XX±1'						
	X.XXX±.004(0.10)	.XXX±0.5'						