



1		2		3		4		5		6		7		8	
Pin No.	3PIN	4PIN							REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD	
Coded									0		New Release	27/Nov		FRANK	

Note:

- 1.⊗Important Dimension
- 2.Waterproof Rate:IP68
- 3.This product must meet IEC61076-2-104
- 4.This product must meet 2011/65/EU ROHS compliance.
- 5.Not note tolerances:±0.20

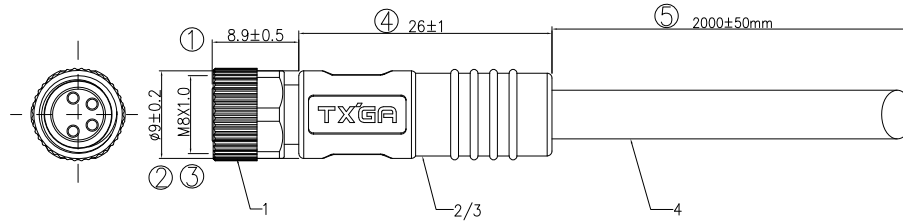

WIRING CHART(FEMALE Front View)

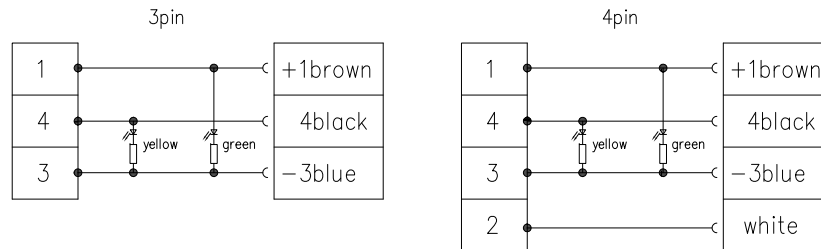

Ordering Information

FCL0M8 - P A XX XXX 0 - XX
1 2 3 4 5 6 7

1 Series Name FCLM8-FM8 2 Category P-Plug 3 Coded A-A CODED 4 Circuits 03-3Circuits 04-4Circuits 5 Length XXX(See Table1)


6 Rotation Angle 0-0° 7 Serial code 00-Standard Parts

TABLE 1

CABLE LENGTH (XXX)	005	010	015	020	025	030	035	040	045		100
L(M)	0.5M	1M	1.5M	2.0M	2.5M	3.0M	3.5M	4.0M	4.5M		10M

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 27/Nov/23	PART NO. FCL0M8-PXXXXXX0-00	ITEM NO. FCL0M8	 Building Technology Cornerstone	
		X.±.012(0.30)	X.±5°	CHECKED BY CHERRY	DATE 27/Nov/23	TITLE M8X1.0 CABLE STRAIGHT SINGLE END FEMALE LED, PNP,PVC	REV 0		
DESIGN UNITS Metric		X.X±.008(0.20)	X.±2°	DRAWN BY DANIEL	DATE 27/Nov/23	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
SCALE 2:1	SIZE A4	X.XX±.006(0.15)	X.X±1°						
		X.XXX±.004(0.10)	.XXX±0.5°						

Packaging:

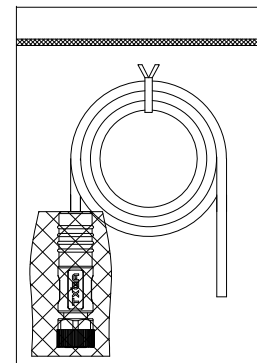

Pin Assignments Front View	Rated Voltage	Rated impulse Voltage	Rated Currnt(40°C)
	60V	800V	4A
	60V	800V	4A

* Note:All Materials Meet The "RoHs" !

4	Cable	2517*4C	black
3	overmold	PVC 45P	clear
2	innermold	PVC 30P	clear
1	connector	M8X1.0 female	1PC
NO.	SPECIFICATION	DESCRIPTION	NOTE