



1		2		3		4		5		6		7		8	
Pin No.		3PIN		4PIN						REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
Coded										0		New Release	13/Nov		FRANK

A-Coded




Note:

- 1.⊗Important Dimension
- 2.Waterproof Rate:IP68
- 3.This product must meet IEC61076-2-104
- 4.This product must meet 2011/65/EU ROHS compliance.
- 5.Not note tolerances:±0.20

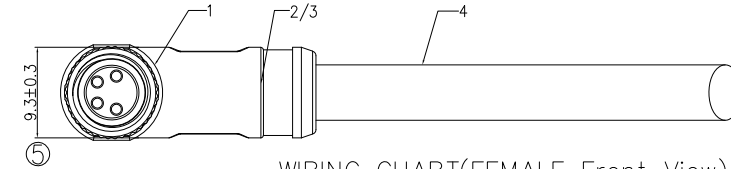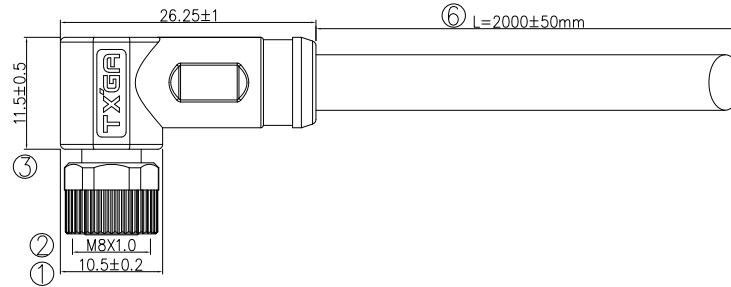

WIRING CHART(FEMALE Front View)

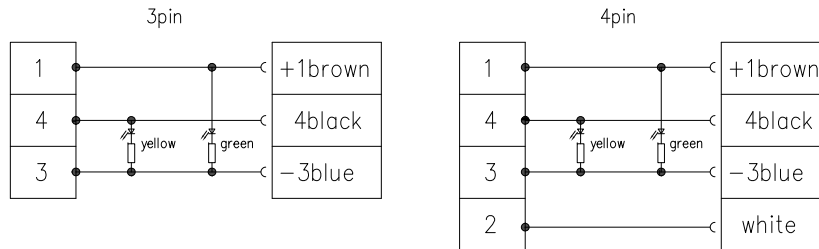

FCL0M8 - P A XX XXX 0 - XX
1 2 3 4 5 6 7

1 Series Name FCL0M8-FM8 2 Category P-Plug 3 Coded A-A CODED 4 Circuits 03-3Circuits 04-4Circuits 5 Length XXX(See Table1)

6 Rotation Angle 1-90° 7 Serial code 00-Standard Parts

TABLE 1

CABLE LENGTH (xxx)	005	010	015	020	025	030	035	040	045		100
L(M)	0.5M	1M	1.5M	2.0M	2.5M	3.0M	3.5M	4.0M	4.5M		10M



DESIGN UNITS
Metric

SCALE 2:1 SIZE A4

GENERAL TOLERANCES
(UNLESS SPECIFIED)

X.±0.12(0.30) X.±5°

X.X±.008(0.20) .X°±2°

X.XX±.006(0.15) .XX°±1°

X.XXX±.004(0.10) .XXX°±0.5°

APPROVE BY
FRANK

CHECKED BY
CHERRY

DRAWN BY
DANIEL

DATE
24/Aug/23

DATE
24/Aug/23

DATE
24/Aug/23

PART NO.
FCL0M8-PXXXXXX1-00

ITEM NO.
FCL0M8

TITLE
M8X1.0 CABLE RIGHT ANGLE SINGLE END

FEMALE LED, PNP,PVC

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION


TXGA

Building Technology Cornerstone

REV 0

SHEET NO. 1/1

Packaging:

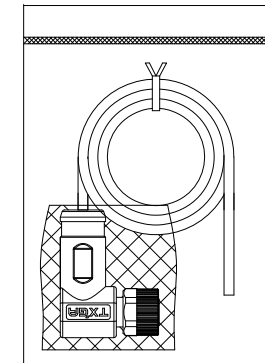

Pin Assignments Front View	Rated Voltage	Rated impulse Voltage	Rated Currnt(40°C)
	60V	800V	4A
	60V	800V	4A

* Note: All Materials Meet The "RoHs" !

4	Cable	2517*4C	black
3	overmold	PVC 45P	clear
2	innermold	PVC 30P	clear
1	connector	M8X1.0 female	1PC
NO.	SPECIFICATION	DESCRIPTION	NOTE