

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Size Change	29/JUN/23	MATT	LEO


SPECIFICATIONS

Electrical

Current Rating: 1A AC(rms)/DC
Voltage Rating: 250V AC(rms) 500V DC
Contact Resistance: 35 mΩ Max
Insulation Resistance: 500 MΩ Min
Withstanding Voltage: 500V AC r.m.s
Temperature Range—Operating: -40°C~+105°C

Material and Plating

Housing: PBT (UL 94V-0), Black
Contact: Copper Alloy/ Selective gold in contact area, tin on tail
Shell: Zinc Alloy/ Nickel plated

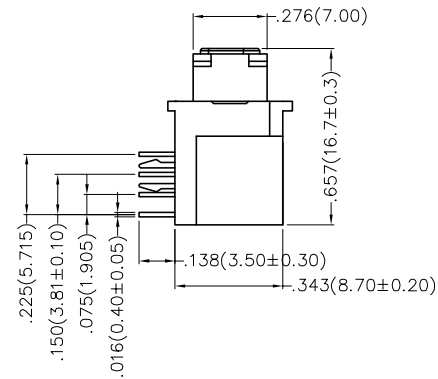

Ordering Information

<u>FCS</u>	<u>100</u>	<u>07</u>	—	<u>F0</u>	<u>D</u>	<u>B</u>	<u>3</u>	<u>XX</u>	<u>K6</u>	<u>K</u>	<u>B</u>
1	2	3		4	5	6	7	8	9	10	11

Recommended P.C.Board Layout
General Tolerances: ±0.05mm

1	Category	2	Circuits	3	Distinction No.	4	Type	5	Assembly Layout	6	Entry Angle
	FCS—SCSI		100		07		F0—Female		D—DIP		B—90° Angle
7	Plating	8	Thickness of Plating	9	Color—Resin	10	Packaging	11	Contact Position		
	3—Selective gold in contact area, tin on tail		00—Gold flash 03—3μ" Custom plate available		K6—Black		K—Tray		B—Versa Needle		

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/OCT/15	PART NO. FCS10007-F0DB3XXK6KB	ITEM NO. FCS10007	 Leader Of Industry	
		X.±.012(0.30)	X.*±5°	CHECKED BY CHERRY	DATE 19/OCT/15	TITLE SCSI Connector Pitch 1.27mm 90° Angle Female			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	.X'±2"	DRAWN BY KATE	DATE 19/OCT/15	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 1	SHEET NO. 2/2
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	.XX'±1°						
		X.XXX±.004(0.10)	.XXX'±0.5°						