
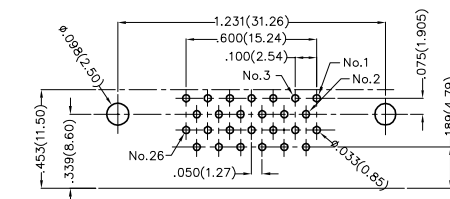
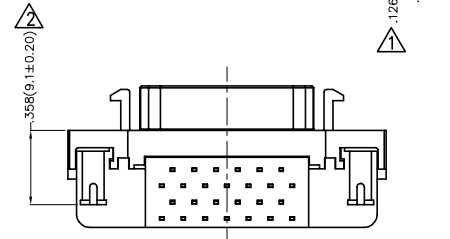

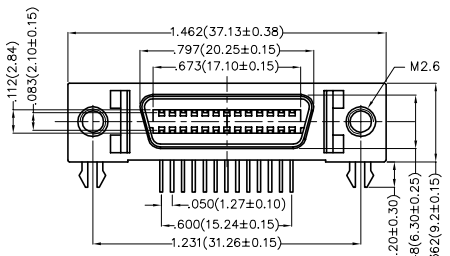


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Update dimensions and tolerances	30/OCT/23	MATT	LEO
2	△	Update dimensions&Add marking code	31/OCT/25	MATT	LEO

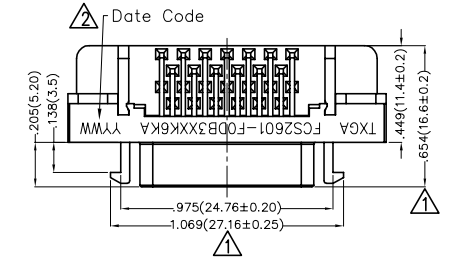

Recommended P.C. Board Layout
General Tolerances: ±0.05mm

SPECIFICATIONS

Electrical
 Current Rating: 1A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 500 MΩ Min
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range—Operating: -55°C~+105°C

Material and Plating
 Housing: PBT (UL 94V-0)
 Contact: Phosphor Bronze
 Contact plating: Selective gold in contact area, tin on tail
 Shell: Zinc Alloy/Nickel Plated


Ordering Information

FCS 26 01 — F0 D B 3 XX K6 K A
 1 2 3 4 5 6 7 8 9 10 11

1	Category FCS—SCSI	2	Circuits 26	3	Distinction No. 01	4	Type F0—Female	5	Assembly Layout D—DIP	6	Entry Angle B—90° Angle
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold flash 03—3μ" Custom plate available	9	Color—Resin K6—Black	10	Packaging K—Tray	11	Distinction Type A—Type A		

 THIRD ANGLE PROJECTION DESIGN UNITS Inch (metric) SCALE 5:1 SIZE A4	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FCS2601-F0DB3XXK6KA	ITEM NO. FCS2601	 Building Technology Cornerstone
	X.±.012(0.30)	X'±5'	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE SCSI Connector Pitch 1.27mm 90° Angle Female		
	X.XX±.008(0.20)	.X'±2'	DRAWN BY KEVIN	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
	X.XX±.006(0.15)	.XX±1'					
	X.XXX±.004(0.10)	.XXX±0.5'					

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Update dimensions and tolerances	30/OCT/23	MATT	LEO
2	△	Update dimensions&Add marking code	31/OCT/25	MATT	LEO

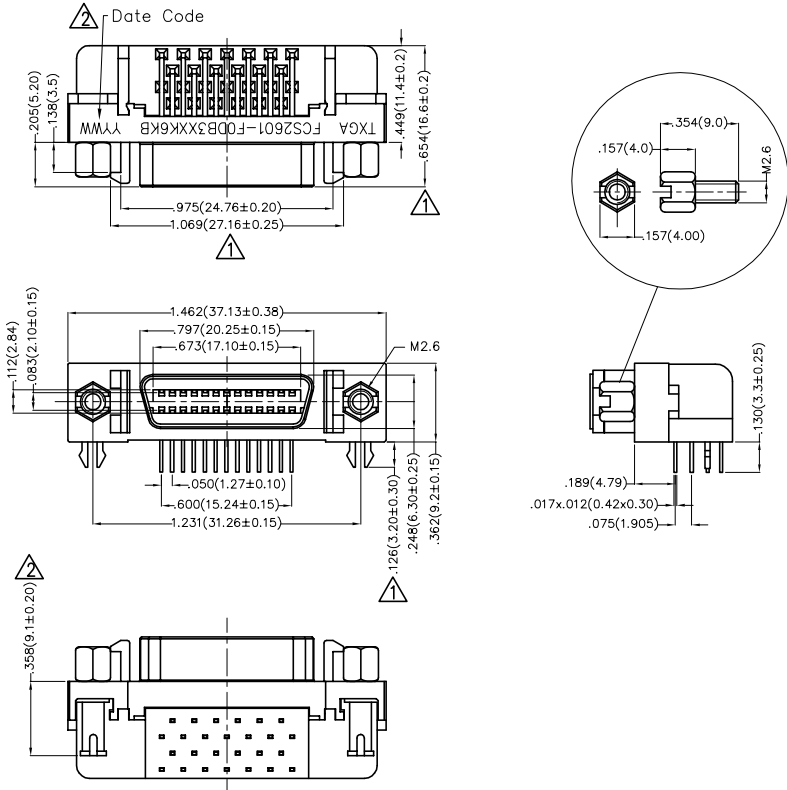


SPECIFICATIONS

Electrical

- Current Rating: 1A AC(rms)/DC
- Voltage Rating: 250V AC(rms)/DC
- Contact Resistance: 30 mΩ Max
- Insulation Resistance: 500 MΩ Min
- Withstanding Voltage: 500V AC r.m.s
- Temperature Range-Operating: -55°C~+105°C

Material and Plating

- Housing: PBT (UL 94V-0)
- Contact: Phosphor Bronze
- Contact plating: Selective gold in contact area, tin on tail
- Shell: Zinc Alloy/Nickel Plated
- Screw: Brass/Nickel Plated

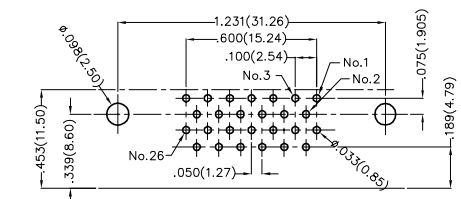

Recommended P.C.Board Layout
General Tolerances: ±0.05mm





Ordering Information

FCS 26 01 — F0 D B 3 XX K6 K B
1 2 3 4 5 6 7 8 9 10 11

1	Category FCS-SCSI	2	Circuits 26	3	Distinction No. 01	4	Type F0-Female	5	Assembly Layout D-DIP	6	Entry Angle B-90° Angle
7	Plating 3-Selective gold in contact area, tin on tail	8	Thickness of Plating 00-Gold flash 03-3μ" Custom plate available	9	Color-Resin K6-Black	10	Packaging K-Tray	11	Distinction Type B-Type B		

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FCS2601-F0DB3XXK6KB	ITEM NO. FCS2601	
	DESIGN UNITS Inch (metric)	X.±0.12(0.30) X.X±.008(0.20)	X'±5' .X'±2'	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE SCSI Connector Pitch 1.27mm 90° Angle Female	
SCALE 5:1	SIZE A4	X.XX±.006(0.15) X.XXX±.004(0.10)	.XX±1' .XX±0.5'	DRAWN BY KEVIN	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	REV 2 SHEET NO. 1/1

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Update dimensions and tolerances	30/OCT/23	MATT	LEO
2	△	Update dimensions&Add marking code	31/OCT/25	MATT	LEO

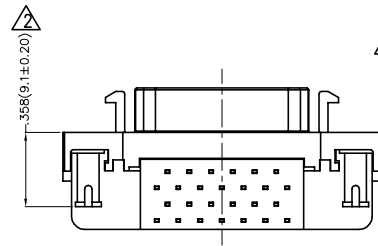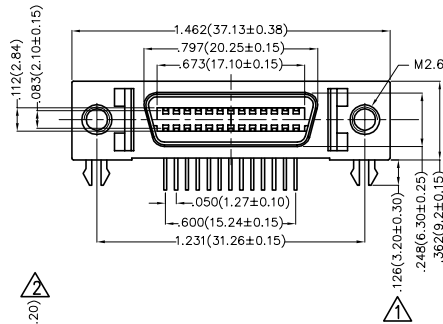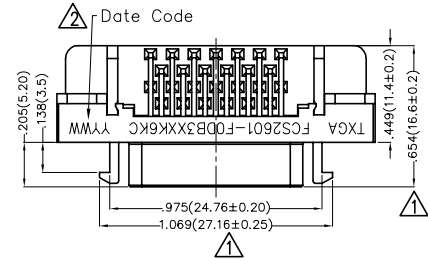


SPECIFICATIONS

Electrical

Current Rating: 1A AC(rms)/DC
 Voltage Rating: 250V AC(rms)/DC
 Contact Resistance: 30 mΩ Max
 Insulation Resistance: 500 MΩ Min
 Withstanding Voltage: 500V AC r.m.s
 Temperature Range—Operating: -55°C~+105°C

Material and Plating

Housing: PBT (UL 94V-0)
 Contact: Phosphor Bronze
 Contact plating: Selective gold in contact area, tin on tail
 Shell: Zinc Alloy/Nickel Plated
 Screw: Brass/Nickel Plated




Screw (2pcs)

Ordering Information

FCS 26 01 — F0 D B 3 XX K6 K C
 1 2 3 4 5 6 7 8 9 10 11

1	Category FCS—SCSI	2	Circuits 26	3	Distinction No. 01	4	Type F0—Female	5	Assembly Layout D—DIP	6	Entry Angle B—90° Angle
7	Plating 3—Selective gold in contact area, tin on tail	8	Thickness of Plating 00—Gold flash 03—3μ" Custom plate available	9	Color—Resin K6—Black	10	Packaging K—Tray	11	Distinction Type C—Type C		

Recommended P.C.Board Layout
 General Tolerances: ±0.05mm

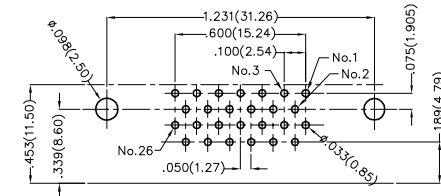

THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 19/JUL/13	PART NO. FCS2601—F0DB3XXK6KC	ITEM NO. FCS2601	Building Technology Cornerstone
	DESIGN UNITS Inch (metric)	X.±.012(0.30) X.X±.008(0.20) X.XX±.006(0.15) X.XXX±.004(0.10)	X'±5' .X'±2' .XX'±1' .XXX'±0.5'	CHECKED BY CHERRY	DATE 19/JUL/13	TITLE SCSI Connector Pitch 1.27mm 90° Angle Female	
SCALE 5:1	SIZE A4		DRAWN BY KEVIN	DATE 19/JUL/13	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		