


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

P1

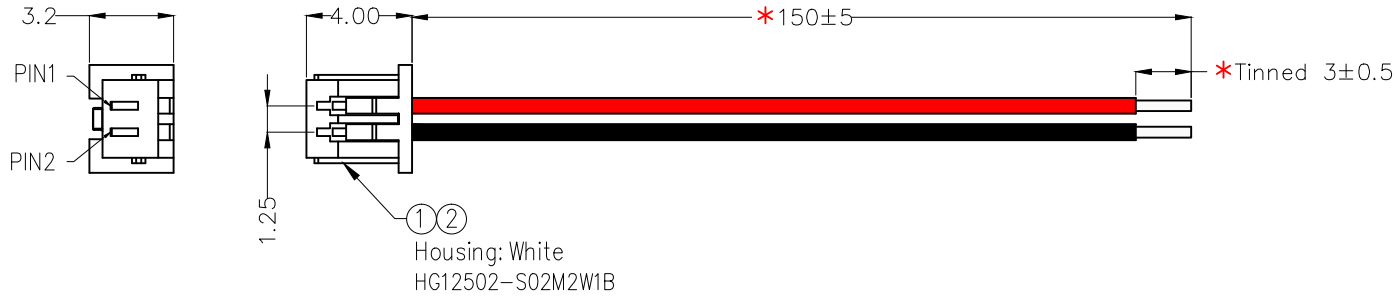

Electrical

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification

1. 50pcs/Bundle, 400pcs/Bag

PIN ASSIGNMENT

P1  
 PIN1 — Red — Tinned  
 PIN2 — Black — Tinned

“\*” as the key size control

\* Note: All Materials Meet The "RoHs" !

③	UL1571 28AWG(7/0.12TS) OD=0.9mm Red/Black:1571-28-R1-UL/1571-28-K6-UL
②	Pitch 1.25mm Terminal: T12501-F2H
①	Pitch 1.25mm Housing (White): HG12502-S02M2W1B
NO.	Specification

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X.±.012(0.30)	X.±5'	FRANK	9/MAY/18	FCW001-000276	FCW001	
DESIGN UNITS Inch (metric)	X.X±.008(0.20)	.X±2'	CHECKED BY	DATE	TITLE		REV 0
SCALE	X.XX±.006(0.15)	.XX±1"	CHERRY	9/MAY/18	Single Conductor Cable		
5:1	X.XXX±.004(0.10)	.XXX±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
A4			Eric	9/MAY/18			