


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

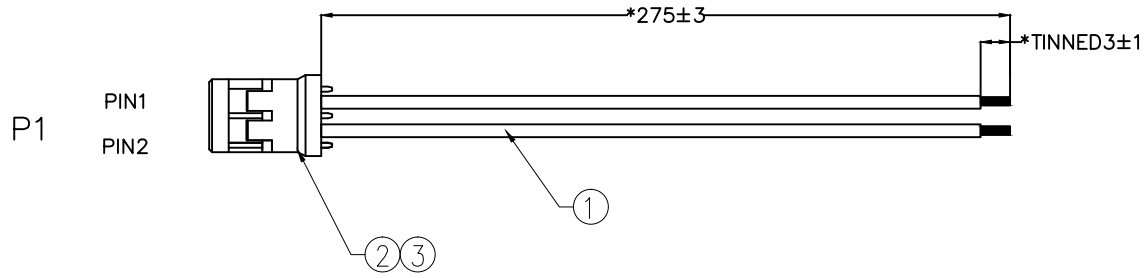

PIN ASSIGNMENT

P1		
PIN1	BLACK	Tinned
PIN2	RED	Tinned

Electrical

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 1Ω (MAX)
3. Insulation Resistance: 10MΩ (MIN)

Packing specification

1. 50pcs/Bundle, 200pcs/Bag

* Note: All Materials Meet The "RoHs" !

3	Wire to board terminal 1.5mm Female(Tin-Plated) T15003-F2H
2	Wire to board housing 1.5mm 2Circuits HG15003-S02M2W1B
1	UL1571 28AWG 1C OD 0.6 RED/BLACK
NO.	Specification

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	<p>Leader Of Industry</p>
	X. ±0.30	X.' ±5'	FRANK	28/FEB/19	FCW001-000620	FCW001	
	DESIGN UNITS Metric		CHECKED BY	DATE	TITLE		
	X.X ±0.20	X.X' ±2'	CHERRY	28/FEB/19	Single Conductor Cable		
SCALE	SIZE	X.XX ±0.15	X.XX' ±1'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
5:1	A4	X.XXX ±0.10	X.XXX' ±0.5'	CHAOWEI	28/FEB/19	REV 1	SHEET NO. 1/1