


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

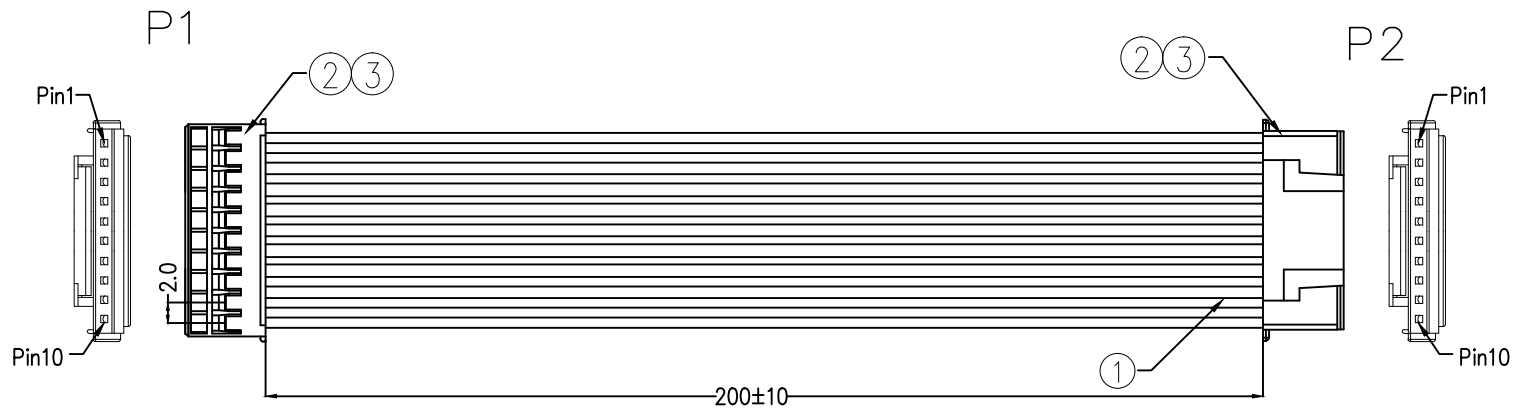

#### PIN ASSIGNMENT

P1		P2
PIN1	Black	PIN1
PIN2	Red	PIN2
PIN3	Black	PIN3
PIN4	Red	PIN4
PIN5	Black	PIN5
PIN6	Red	PIN6
PIN7	Black	PIN7
PIN8	Red	PIN8
PIN9	Black	PIN9
PIN10	Red	PIN10

#### Electrical



1. Withstanding Voltage: DC 300V
2. Conduction impedance:  $3\Omega$  (MAX)
3. Insulation Resistance:  $10M\Omega$  (MIN)

#### Packing specification

25pcs/Bundle, 150pcs/Bag

\* Note: All Materials Meet The "RoHs" !

3	Wire to board terminal 2mm Female(Tin-Plated): T20004-F2H
2	Wire to board housing 2mm 10Circuits: HG20005-S10M2W1B
1	UL1007 26AWG(7/0.16TS) OD=1.30mm (Black/Red)
NO.	Specification

 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 16/SEP/19	PART NO. FCW001-000957	ITEM NO. FCW001	 Leader Of Industry	
DESIGN UNITS Metric		X. $\pm 0.30$	X.* $\pm 5^{\circ}$	CHECKED BY	DATE	TITLE SINGLE CONDUCTOR CABLE			
		X.X $\pm 0.20$	X.X* $\pm 2^{\circ}$	CHERRY	16/SEP/19				
SCALE 5:1	SIZE A4	X.XX $\pm 0.15$	X.XX* $\pm 1^{\circ}$	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX $\pm 0.10$	X.XXX* $\pm 0.5^{\circ}$	Aubrey	16/SEP/19				
						REV 0		SHEET NO. 1/1	