


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

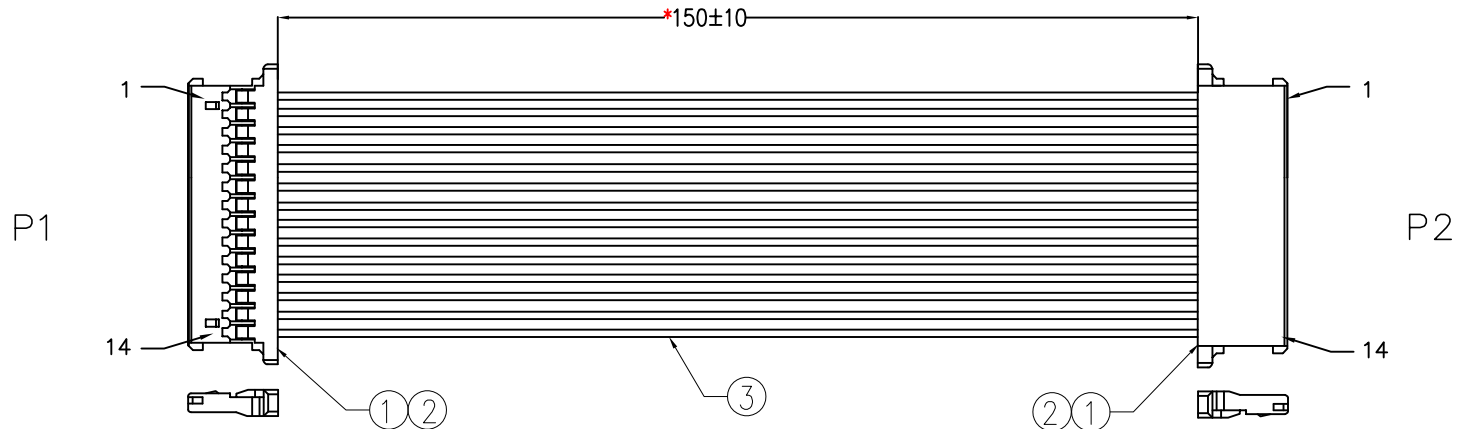

P1	P2	COLOR	P1	P2	COLOR
1	1	BLACK	8	8	BLACK
2	2		9	9	
3	3		10	10	
4	4		11	11	
5	5		12	12	
6	6		13	13	
7	7		14	14	

3	UL1571 28AWG(7/0.127TS) OD=0.9mm Black
2	Wire to board terminal 1.25mm Female(Gold-Plated) T12503-F2H
1	Wire to board housing 1.25mm 14Circuits:HG12504-S14M2W1B
NO.	SPECIFICATION

ELECTRICAL
 1. Withstanding Voltage: DC 300V
 2. Conduction impedance: 3Ω (MAX)
 3. Insulation Resistance: 10MΩ (MIN)

PACKING SPECIFICATION
 1. 25pcs/Bundle, 250pcs/Bag
 2. "*" as the key size control

NOTES
 1. This product must meet UL486A-1991 mechanical performance.
 2. This product must meet 2011/65/EU ROHS compliance.
 3. Cable assembly to be tested 100% for continuity and polarity.

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry	
	X. ±0.30	X.' ±5'	FRANK	27/JUL/20	FCW001-001211	FCW001		
	DESIGN UNITS	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		
	Metric	X.XX ±0.15	X.XX' ±1'	CHERRY	27/JUL/20	SINGLE CONDUCTOR CABLE		
SCALE	SIZE	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
5:1	A4			ZOEY	27/JUL/20	REV 0	SHEET NO. 1/1	