


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

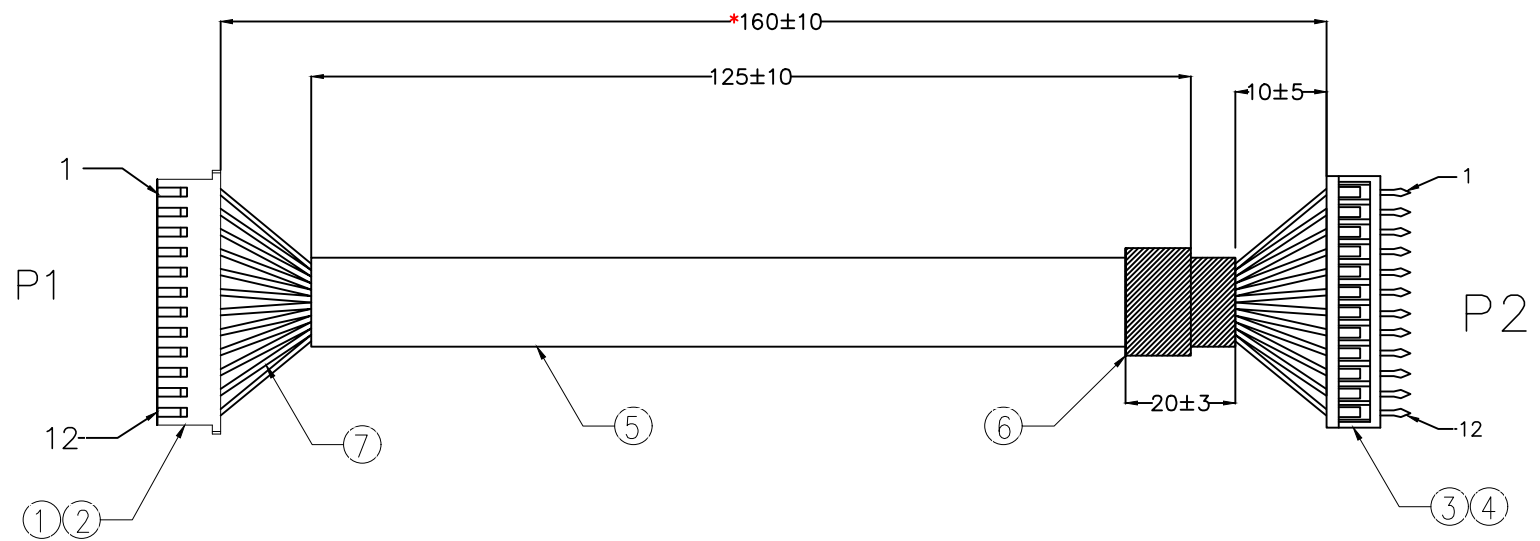

WIRING CHART		
P1	P2	COLOR
1	1	Blue
2	2	Orange
3	3	Green
4	4	Brown
5	5	Gray
6	6	White
7	7	Red
8	8	Black
9	9	Yellow
10	10	Purple
11	11	Orange
12	12	Blue

ELECTRICAL
 1. Withstanding Voltage: DC 300V
 2. Conduction impedance: 3Ω (MAX)
 3. Insulation Resistance: 10MΩ (MIN)

PACKING SPECIFICATION
 1. 25pcs/Bundle, 200pcs/Bag
 2. "*" as the key size control

NOTES
 1. This product must meet UL486A-1991 mechanical performance.
 2. This product must meet 2011/65/EU ROHS compliance.
 3. Cable assembly to be tested 100% for continuity and polarity.

7	UL1007 24AWG(11/0.16TS) OD=1.40mm Blue/Orange/Green/Brown/Gray/White/Red/Black/Yellow/Purple
6	Black Heat Shrink Tube ø10.0mm R-4HA-49
5	PVC Tube ø8.0 Black
4	Pitch 2.0mm Terminal: T20008-M2H
3	Pitch 2.0mm housing: HG20009-S12M2W1B
2	Pitch 2.5mm Terminal: FT25001-F2H
1	Pitch 2.5mm housing: HG25001-S12M2W1B
NO.	SPECIFICATION

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO.	ITEM NO.	 Leader Of Industry
	X. ±0.30	X.* ±5'	FRANK	30/OCT/20	FCW001-001245	FCW001	
DESIGN UNITS Metric	X.X ±0.20	X.X' ±2'	CHECKED BY	DATE	TITLE		
SCALE 5:1	X.XX ±0.15	X.XX' ±1'	CHERRY	30/OCT/20	SINGLE CONDUCTOR CABLE		REV 0
SIZE A4	X.XXX ±0.10	X.XXX' ±0.5'	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 1/1
			JOE	30/OCT/20			