


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1	△	Change Heat shrink tube	2023/04/19		HU

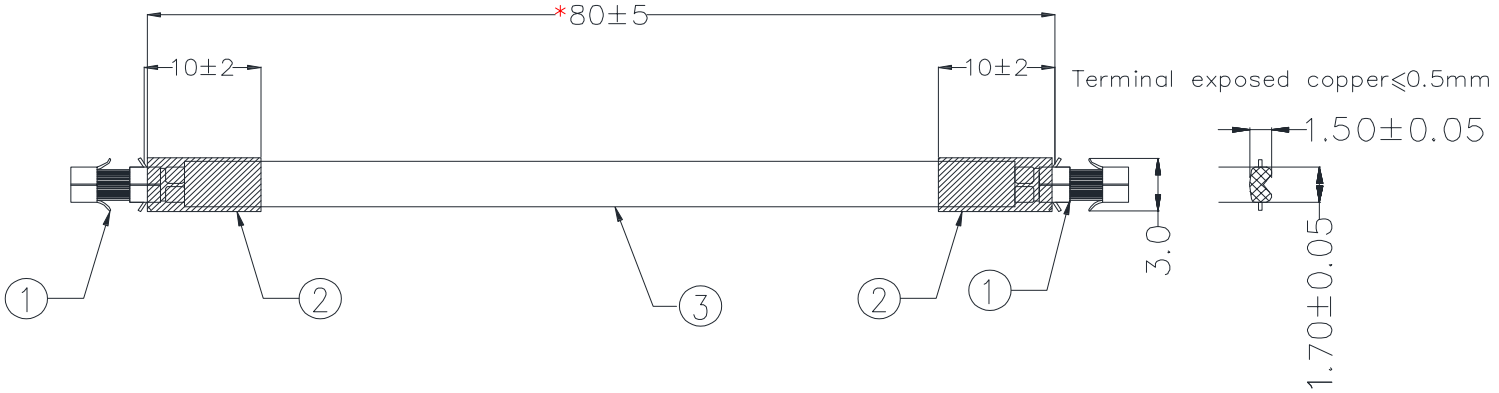

**ELECTRICAL**

1. Withstanding Voltage: DC 300V
2. Conduction Impedance:  $3\Omega$  (Max)
3. Insulation Resistance:  $10M\Omega$ (Min)

**PACKING SPECIFICATION**

1. 20pcs/Bundle, 200pcs/Bag
2. "\*" as the key size control

**NOTES**

1. This product must meet UL486A-1991 mechanical performance
2. This product must meet 2011/65/EU ROHS compliance
3. Cable assembly to be tested 100% for continuity and pikarity

3	UL1015 18AWG(41/0.16TS) OD=2.80mm Yellow/Green
2	Heat shrink tube , $\phi$ 3mm ,Black , ,Printing HST-030BK0Y-01
1	Wire to board terminal 2mm Male(Tin-Plated): T20013-M2H
NO.	SPECIFICATION

<p>THIRD ANGLE PROJECTION</p>	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY	DATE	PART NO. FCW001-001339	ITEM NO. FCW001	<p>Building Technology Cornerstone</p>		
	X. $\pm 0.30$	X.' $\pm 5'$	FRANK	18/JAN/21					
	DESIGN UNITS METRIC(mm)	X.X $\pm 0.20$	X.X' $\pm 2'$	CHECKED BY	DATE	TITLE		REV 0	SHEET NO. 1/1
	SCALE	X.XX $\pm 0.15$	X.XX' $\pm 1'$	CHERRY	18/JAN/21	Single Conductor Cable			
5:1	X.XXX $\pm 0.10$	X.XXX' $\pm 0.5'$	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
SIZE			JOE	18/JAN/21					
A4									