


REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
1		Housing Change	12-May-21	JOE	CHERRY

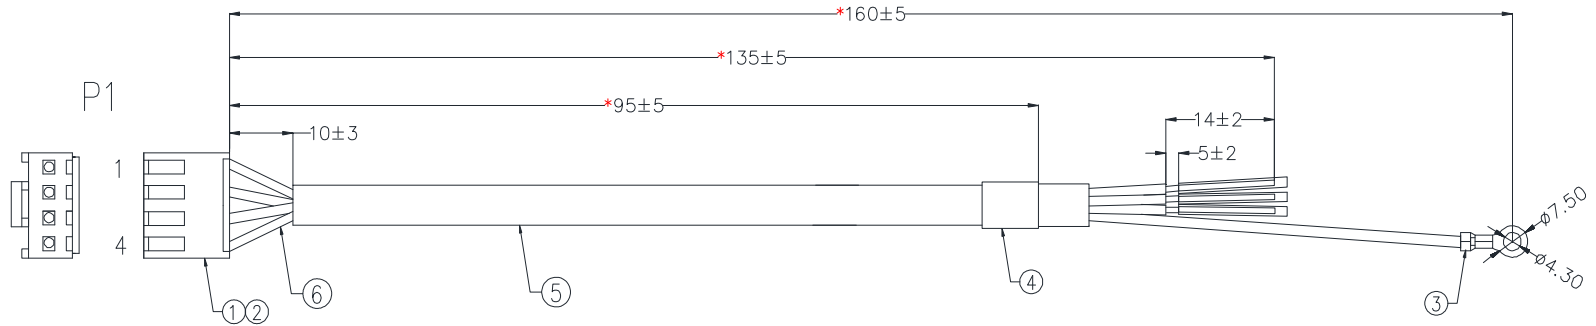

P1		COLOR
1	OPEN	BLUE
2	OPEN	BLACK
3	Round Terminal	YELLOW/GREEN
4	OPEN	RED

NO.	SPECIFICATION
6	UL1332 18AWG(19/0.23TS) OD=1.76mm (Red,Black,Blue,Yellow/Green)
5	PVC Tube Gray(Cool Gray 8U) \varnothing 5mm
4	Black Heat Shrink Tube \varnothing 6.0*20mm R-4HA-11
3	Round Terminal : \varnothing 7.5x \varnothing 4.3 T43001-F2H
2	Pitch 3.96mm Terminal:T39601-F2H
1	Pitch 3.96mm Housing:Hx39600-4Y-U1

ELECTRICAL

1. Withstanding Voltage: DC 300V
2. Conduction impedance: 3Ω (MAX)
3. Insulation Resistance: $10M\Omega$ (MIN)

PACKING SPECIFICATION

1. 25pcs/Bundle,200pcs/Bag
- 2."*"as the key size control

NOTES

- 1.This product must meet UL486A-1991mechanical performance.
- 2.This product must meet 2011/65/EU ROHS compliance.
- 3.Cable assembly to be tested 100% for continuity and polarity.

		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 12/MAY/21	PART NO. FCW001-001429	ITEM NO. FCW001	 Leader Of Industry	
THIRD ANGLE PROJECTION				CHECKED BY CHERRY	DATE 12/MAY/21	TITLE SINGLE CONDUCTOR CABLE			
DESIGN UNITS Metric	X.±0.30	X.°±5°		DRAWN BY JOE	DATE 12/MAY/21	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		REV 1	SHEET NO. 1/1
SCALE 5:1	SIZE A4	X.XX±0.15	X.XX°±1°						
		X.XXX±0.10	X.XXX°±0.5°						