



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
0		New Release	1/Feb		FRANK

Note:
 1. *Important Dimension
 2. Waterproof Rate: IP68
 3. This product must meet IEC61076-2-101
 4. This product must meet 2011/65/EU ROHS compliance.
 5. Not note tolerances: ±0.20

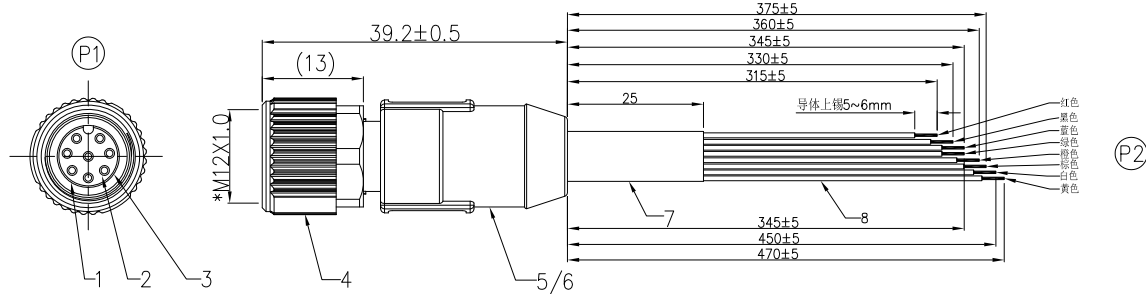

对插面正视图

P1	P2	AWG
1	蓝色	22AWG
2	绿色	22AWG
3	白色	22AWG
4	黄色	22AWG
5	橙色	22AWG
6	棕色	22AWG
7	红色	20AWG
8	黑色	20AWG

* Note: All Materials Meet The "RoHs" !

NO.	SPECIFICATION	NOTE
8	UL1569 lize 6C*22AWG+2C*20AWG	blue/green/white/yellow orange/brown/red/black
7	Heat Shrink Tubing Ø6.0	Black
6	overmold PVC 60P,Black,ROHS2.0	Black
5	innermold PVC 30P,Black,ROHS2.0	Black
4	M12X1.0 female Screw	1PC
3	O-ring	1PC
2	female terminal	8PCS
1	M12X1.0 A-Coded 8P female hosuing	1PC

ELECTRICAL
1. Withstanding Voltage:DC 300V
2. Conduction Impedance: 3Ω (Max)
3. Insulation Resistance: 10MΩ(Min)
PACKING SPECIFICATION
1. 10pcs/Bag
2. "*"as the key size control
NOTES
1.This product must meet UL486A-1991mechanical performance
2.This product must meet 2011/65/EU ROHS compliance

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 1/FEB/24	PART NO. FCW002-0000327-00	ITEM NO. FCW002	 Building Technology Cornerstone
	DESIGN UNITS Metric	X.±0.12(0.30)	X.±5'	CHECKED BY CHERRY	DATE 1/FEB/24	TITLE M12X1.0 A-Coded 8PIN Female ST Without Shield	
SCALE 2:1	SIZE A4	X.XX±.006(0.15)	.XX±1'	DRAWN BY DANIEL	DATE 1/FEB/24	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX±.004(0.10)	.XXX±0.5'			REV 0	SHEET NO. 1/1