



REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD
0		New Release	26/MAY		FRANK

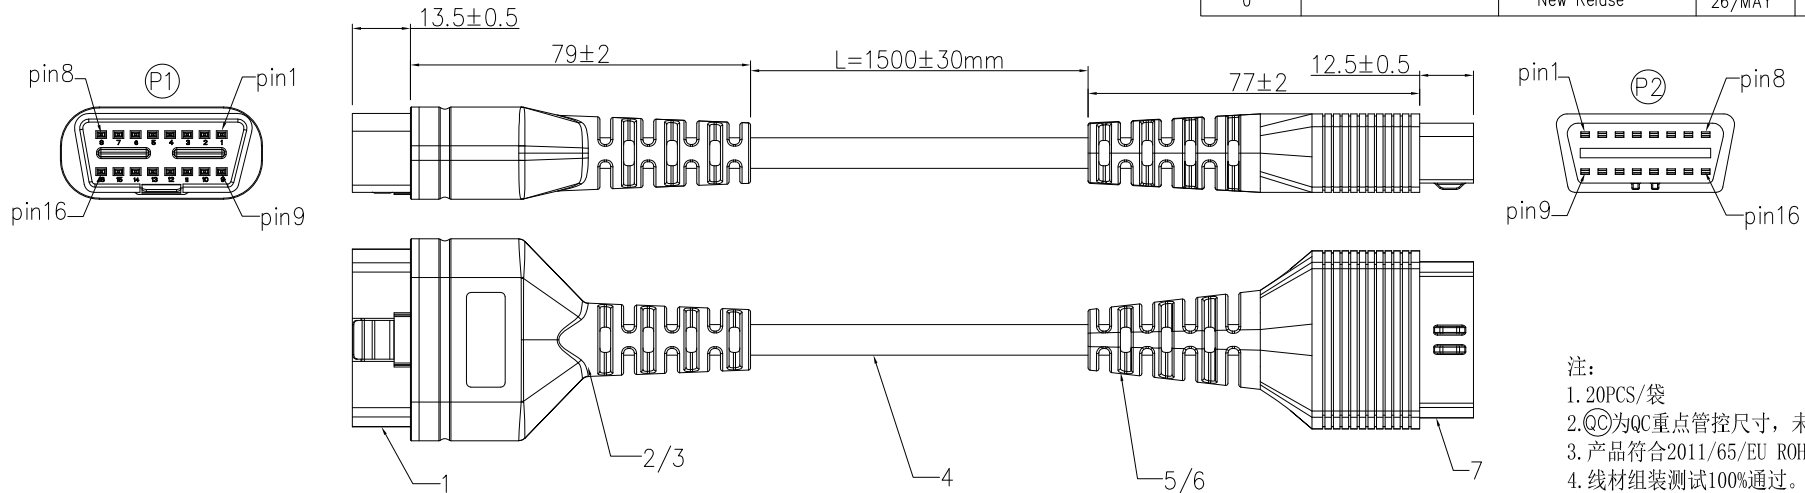

- 注:
- 20PCS/袋
  - Ⓢ为QC重点管控尺寸, 未注尺寸公差±0.15
  - 产品符合2011/65/EU ROHS部件
  - 线材组装测试100%通过。
  - 所有材料符合ROHS标准。

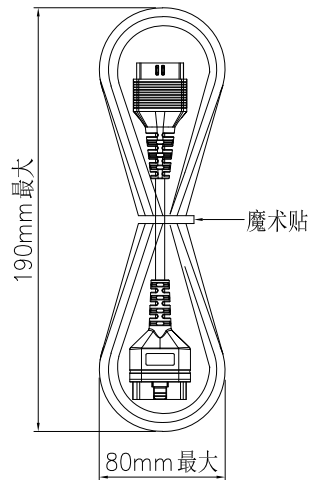

WIRING CHART			
P1	P2	COLOR	AWG
1	1	红色	28AWG
2	2	绿色	28AWG
3	3	浅绿	28AWG
4+5	4+5	黑色	24AWG
6	6	白色	28AWG
7	7	黑色	28AWG
8	8	粉色	28AWG
9	9	浅蓝	28AWG
10	10	紫色	28AWG
11	11	浅蓝	28AWG
12	12	灰色	28AWG
13	13	橙色	28AWG
14	14	黄色	28AWG
15	15	蓝色	28AWG
16	16	红色	24AWG

对绞线  
单线  
对绞线  
粗线  
粗线  
单线  
单线  
单线  
单线  
对绞线  
单线  
单线  
粗线

\* Note: All Materials Meet The "RoHs" !

7	OBD male connector	OBD21-HBKK-000	1PC
6	overmold	PVC 60P	black
5	innermold	PVC 30P	black
4	cable	NTCE-00-15ABK07101-01	∅7.1
3	overmold	PVC 60P	black
2	innermold	PVC 30P	black
1	OBD male connector	OBD10-P16BK2K-000	1PC
NO.	SPECIFICATION	DESCRIPTION	NOTE

<b>ELECTRICAL</b>
1. Withstanding Voltage: DC 300V
2. Conduction Impedance: 3Ω (Max)
3. Insulation Resistance: 10MΩ (Min)
<b>PACKING SPECIFICATION</b>
1. 1pcs/Bundle, 20Pcs/Bag
<b>NOTES</b>
2. "*" as the key size control
1. This product must meet UL486A-1991 mechanical performance
2. This product must meet 2011/65/EU ROHS compliance

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DATE	APPROVE BY	PART NO.	ITEM NO.	 Building Technology Cornerstone
	X.±0.12(0.30)	X.±5*	FRANK	26/MAY/24	FCW002-00000330-00	FCW002	
	DESIGN UNITS Metric		CHECKED BY	DATE	TITLE		
	X.X±.008(0.20)	.X±2*	CHERRY	26/MAY/24	OBD male to OBD female L=1500mm		
SCALE NT	SIZE A4	X.XX±.006(0.15)	.XX±1*	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S,Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
		X.XXX±.004(0.10)	.XXX±0.5*	DANIEL	26/MAY/24	REV 0	SHEET NO. 1/1